

## VK208F21

### CONNECTION TECHNOLOGY • CABLE SOCKETS / CONNECTORS PRE-ASSEMBLED ON TWO SIDES

, Connection cable, 2m, M12 Male (connector) 4pin Angular, D-coding, RJ45 Male (connector) 4pin Straight, 4x0.14mm<sup>2</sup>, Category 5E, -40-75°C, TPU, Shielded



#### MECHANICAL FEATURES

Approx. outer diameter	4.8 mm
Cable infeed of A connection	Angular
Cable infeed of B connection	Straight
Cable length	2 m
Coding of connection A	D-coding
Color of outer sheath	Green
Core identification	Color
Housing material	TPU
Material of outer sheath	PUR (Polyurethane)
Number of cores	4
Perm. ambient temperature of cable, fixed cable	-40 °C ... 75 °C
Version	Connection cable
Wire assembly	18 x 0.1mm
Wire cross section	0.14 mm <sup>2</sup>

#### ELECTRICAL FEATURES

Number of pins of A connection	4
Number of pins of B connection	4
Shielded	+
Type of A electrical connection	M12
Type of B electrical connection	RJ45
Type of plug-in contact, A connection	Male (connector)
Type of plug-in contact, B connection	Male (plug)

#### OTHER FEATURES

Category	5E
Halogen-free	+


#### Other

Packaging dimensions	0.0mm x 0.0mm x 0.0mm
Shipping weight	
Tariff code	85444290


## Classification

ipf product group	851
eClass 8.0	27279218
eClass 9.0	27060311
eClass 9.1	27060311
ETIM-5.0	EC000830
ETIM-6.0	EC000830
ETIM-7.0	

## Connection

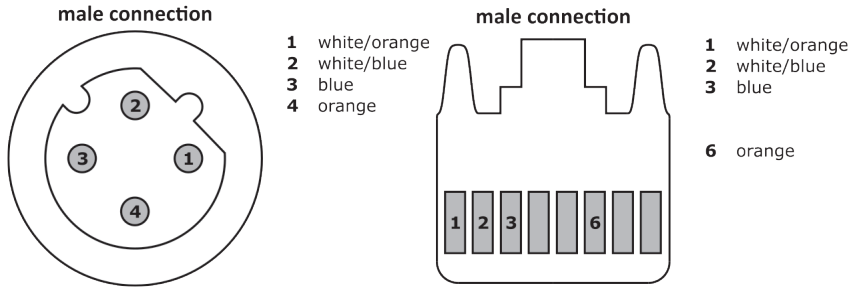

## Dimensional drawing

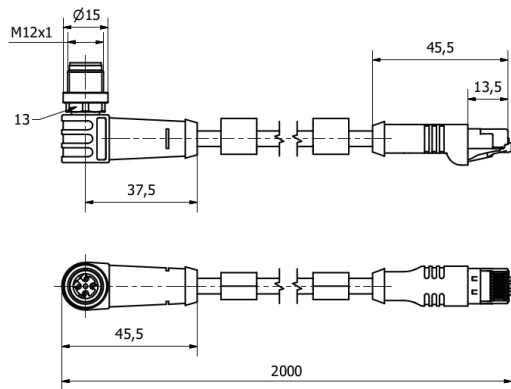

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.