

## VK06F004

### Connection technology • Cable sockets / connectors pre-assembled on two sides

Line for camera lighting in flash mode on OC53 with internal flash controller, 0.6m, M8 connector 4-pin straight, M12 socket 4-pin straight, 4-wire



### For flash operation on OC53 with internal flash controller

This connection cable has pre-wired connections on both sides. It can be used to cost-effectively integrate end devices with a plug connection via a distribution terminal or a logic module.

#### Electrical features

Type of plug-in contact, A connection	Female (socket)
Type of plug-in contact, B connection	Male (connector)
Type of A electrical connection	M12
Type of B electrical connection	M8
Number of pins of A connection	4
Number of pins of B connection	4

#### Mechanical features

Number of cores	4
Wire assembly	42 x 0.1mm
Cable length	0.6 m
Cable infeed of A connection	straight
Cable infeed of B connection	straight


#### Classification

ETIM 8	EC001855 Assembled sensor-actuator cable
--------	--


#### More

IPF Product Group	914 accessories camera sensors
packaging dimensions	24.2 x 16.2 x 6 mm
gross weight	43 g
Customs tariff number	85444290
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

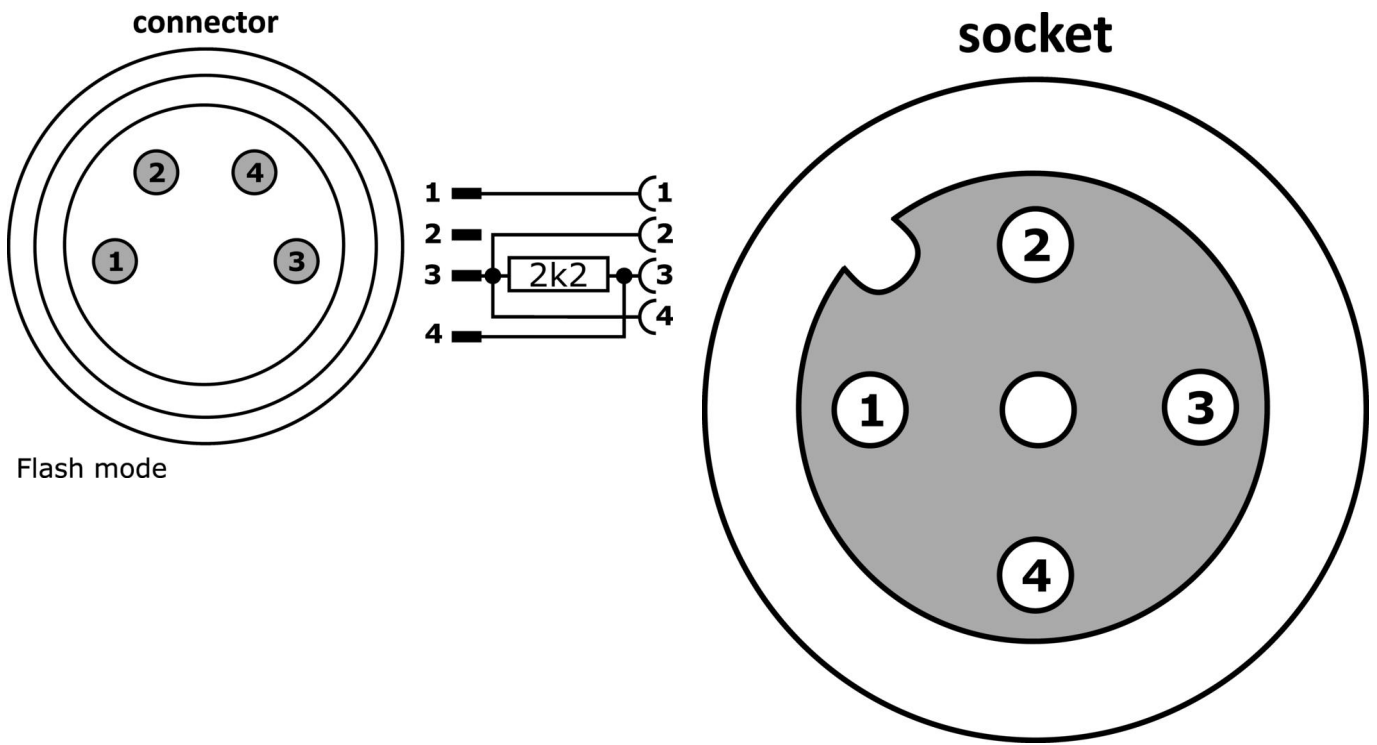

Dimensional drawing

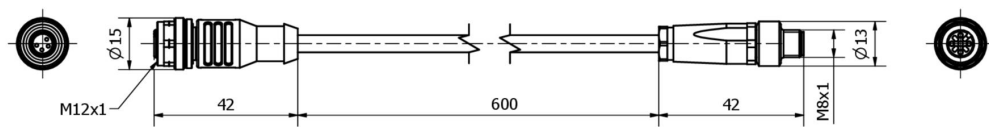

**Extract accessories program****AV000142**

accessories cable socket,  
Mounting clip, 8.5mm, PPO,  
Packaging unit 5, Accessories for  
Cable socket/connector M8

**AV000117**

Labeling material, Label, 2,  
1x30x4mm, Plastic PC, 34  
identification labels

**AY000141**

Plastic sheath, Ø17mm, Inner  
diameter 10mm, -40-250°C, Glass  
fiber with silicone rubber, Short-  
term resistance to weld spatter  
1200°C, Tensile strength 400N,  
Flexible, Flame retardant, yard  
good

**AV000140**

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried  
out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3  
ElektroG: 40951076

**Safety warnings**

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.