

AO990575

Accessories • Reflectors and reflective film

accessories optical, reflector, 18x60x78mm, Screw hole, 2x∅4.5mm, 24V AC/DC, Plastic ABS+PMMA, With heater, Polarized



In order to operate a retro-reflective sensor with polarizing filter, the use of reflectors with prismatic mirrors is absolutely necessary. All our reflectors fulfill this condition. The special feature of this system lies in the polarizing filters located in front of the transmitter and receiver. The transmitter emits a polarized electromagnetic wave, which is rotated 90° by the prismatic mirrors in the oscillation axis and reflected back again. The receiving optical system with polarizing filter is only transmissive for waves that are turned by 90°. Thus, even the detection of high-glossy objects is possible, since the light directly reflected from the object is not evaluated. Special reflectors for laser sensors are available. The honeycomb structure of these reflectors is significantly finer than with conventional ones. For outdoor use, we offer reflectors with integrated heating, which prevents fogging. For tight spaces, self-adhesive reflected film in various widths is available by the metre.

Electrical features

Power	1.4 W
Operating voltage (AC 50Hz)	24 V
Operating voltage (DC)	24 V
Polarized	Yes

Mechanical features

Design	Rectangular
Bore diameter	4.5 mm
Width	78 mm
Height	17.5 mm
Length	60 mm
Mounting method	Screw mounting
Material	Plastic ABS
Active area material of sensor	Plastic (PMMA)
Ambient temperature	-20 - 65 °C

Other features

Features	with heating
----------	--------------


Classification

ETIM 8	EC002467 Reflector for light barrier
--------	--------------------------------------


More

IPF Product Group	900 accessories
packaging dimensions	123 x 77 x 25 mm
gross weight	55 g
Customs tariff number	39269097
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

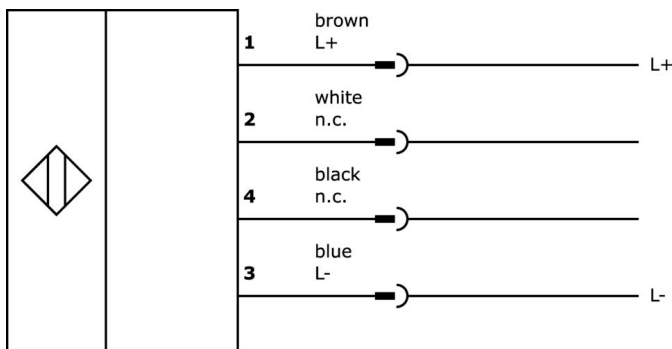

Dimensional drawing

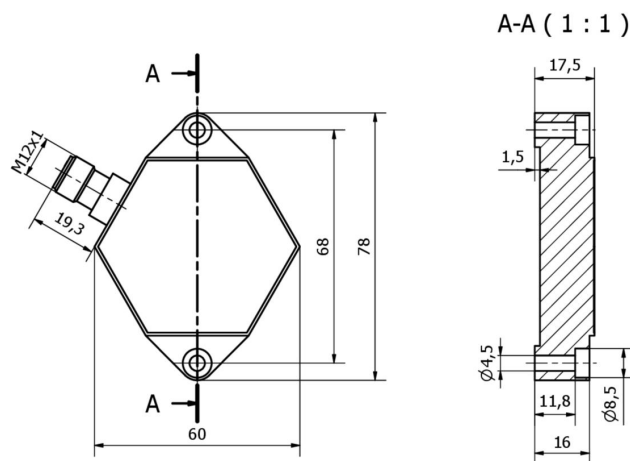

Extract accessories program**VK000037**

Adaption, M12 Female (socket)
3pin Straight, M8 Male
(connector) 3pin Straight, 24V, -
25-85°C, IP67, Oil and cooling
lubricants, Welding area

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.