


EM420124

LED lights • Machine and bench lights

LED machine light, Ø40mm 715long, white light, 17W, 3000lx, 5500K, 24V diagnostic coverage, -30-60°C, M12-connector 4-pin, IP54, aluminum+PMMA diffuse, addable

including Self-tapping screw



LED lights are required in nearly every industrial sector. A lighting coordinated on the respective workplace ensures a better visibility, increases the production quality, the working safety and helps additionally to save energy costs. Their long lifetime, which is independent of switching cycles, reduces maintenance costs and increases the availability. LED lights are used for the illumination of workplaces, work areas of machines, control cabinets and several other fields of application.

Electrical features

Type of electrical connection	Connector M12
Rated operating current	710mA
Power	17W
Luminous flux	2520lm
Number of pins	4
Protection class	III
Operating voltage (DC)	24V
Cascadable	Yes
ardSOCA_ElektrischerAnschluss	M12 4-pin plug connector
ardSOCA_Betriebsspannung	24VDC

Mechanical features

Design	Pipe
Diameter	40mm
Length	715mm
Degree of protection (IP)	IP54
Front screen scattering behavior	diffuse
Housing material	Aluminum
Front screen material	Polymethyl methacrylate
Ambient temperature	-30 - 60°C
ardSOCA_Abmessungen	Ø40mm, 715mm long

Optical features

Illuminance at 500mm distance	3000lx
Illumination in the center (distance 1 m)	750lx
Color temperature	5500K
Lamp	LED
Light source	White light
Angle of beam spread	100°

Other features

Risk group	0
Harsh environmental conditions	Yes


Classification

ETIM 8	EC000348 Machine and workbench light
--------	--------------------------------------


More

IPF Product Group	190 machine illuminations
packaging dimensions	1180 x 80 x 80 mm
gross weight	995 g
Customs tariff number	94054239
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

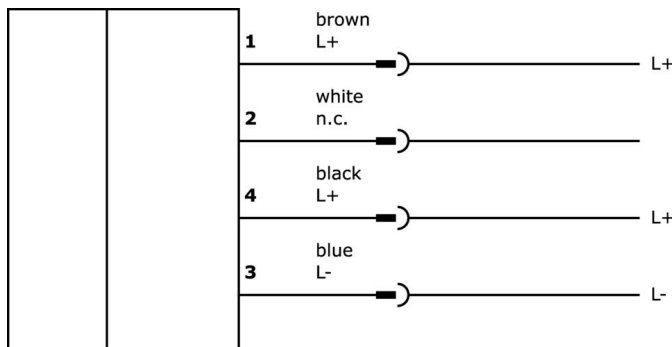

Dimensional drawing

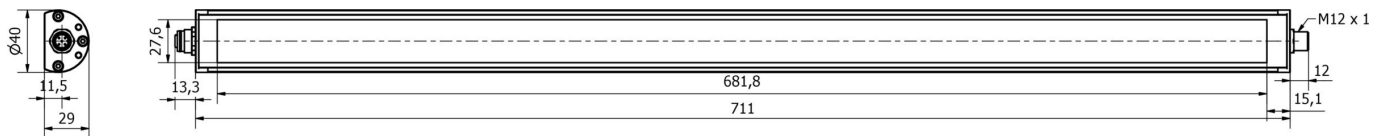

Extract accessories program

VK200021



Connection cable, 2m, M12 Female (socket) 3pin Angular, Free conductor end, 3x0.34mm², PUR (Polyurethane), Ø4.3mm, 250V, -30-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free

VK200025



Connection cable, 2m, M12 Female (socket) 3pin Straight, Free conductor end, 3x0.34mm², PUR (Polyurethane), Ø4.3mm, 250V, -30-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free

NG400501



DC power supply, 1-phase, 125x114x40mm, 24-28V, 5A, 90-264V AC 50Hz, 90-264V AC 60Hz, 127-370V diagnostic coverage, screw connection, IP20, aluminum, stabilized, pulsed output voltage

VK003021



Cable socket, Angular, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 60V, -25-90°C, M12 Female (socket) 5pin, IP67, PBT

VK003025



Cable socket, Straight, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 60V, -25-90°C, M12 Female (socket) 5pin, IP67, PBT

VK030F21



Connection cable, 0.3m, M12 socket 4-pin angular, M12 connector 4-pin straight, 4x0.34mm², 240V, IP67, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VK030F25



Connection cable, 0.3m, M12 socket 4-pin straight, M12 connector 4-pin straight, 4x0.34mm², PUR (polyurethane), 240V, IP67, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VY000007



LED brightness module, 55x120x80mm, 4A, 24V DC, M12-connector, IP40, plastic

VK000037



Adaption, M12 Female (socket) 3pin Straight, M8 Male (connector) 3pin Straight, 24V, -25-85°C, IP67, Oil and cooling lubricants, Welding area

You can find further accessories on our homepage

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.

/ LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.