

## LS207031

### Fiber optic sensors • Fiber optics plastic fiber barrier

fiber optic barrier, 2m, head: 16long M4x0.7 Ø3, Light exit Axial, conductor: Plasticfiber+Plastic, -60-130°C

including Nut



Fiber optics in combination with the appropriate fiber optic amplifier function as contactless and wear-free position switches that can also be used in harsh environmental conditions. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). Because the ends and heads of the fiber optics have small dimensions and the fiber optics are flexible, very elegant solutions can be created for detecting objects in places that are difficult to access. Fiber optics can be used without special precautions in potentially explosive areas and in zones with electrical and/or magnetic fields (high-voltage installations, electrical welding equipment) as their function is not thereby affected. Fiber optics are available in versions for implementing the function as through-beam sensor or diffuse reflection sensor.

#### Electrical features

Bending section of the sensing head	0 mm
Bending angle of the sensing head	0 °
Short-circuit protection	No
Sensing head length	16 mm
Switching distance	0 - 250 mm
Reverse polarity protection	No

#### Mechanical features

Type of fiber	Mono
Design	Cylinder plain
Bending radius (fixed)	25 mm
Sensing head diameter 1	3
Fiber diameter	1 mm
Light exit diameter	1.5
Fiber optic cable diameter, receiver end	2.2
Fiber optic cable diameter, transmitter end	2.2
Sensing head diameter	3 mm
Number of fibers	2
Length	2000 mm
Sheathing material	Plastic
Fiber optics core material	Plastic
Ejection control	Yes
Design of the fiber optic connection	terminal connection
Thread dimension of sensing head 1	M4
Ambient temperature	-60 - 130 °C

**Optical features**

Light exit	axial
------------	-------

**Other features**

Sensing head thread pitch 1	0.7
Feeding technology	Yes
Thread dimension of sensing head 1	M4
ardTE00_Anwendungen	Stanzwerkzeuge starke Verschmutzung


**Classification**

ETIM 8	EC002651 Fiber optic sensor/amplifier
--------	---------------------------------------

**More**

IPF Product Group	151 plastic fibers
packaging dimensions	149 x 124 x 28 mm
gross weight	60 g
Customs tariff number	90011090
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

**Dimensional drawing**

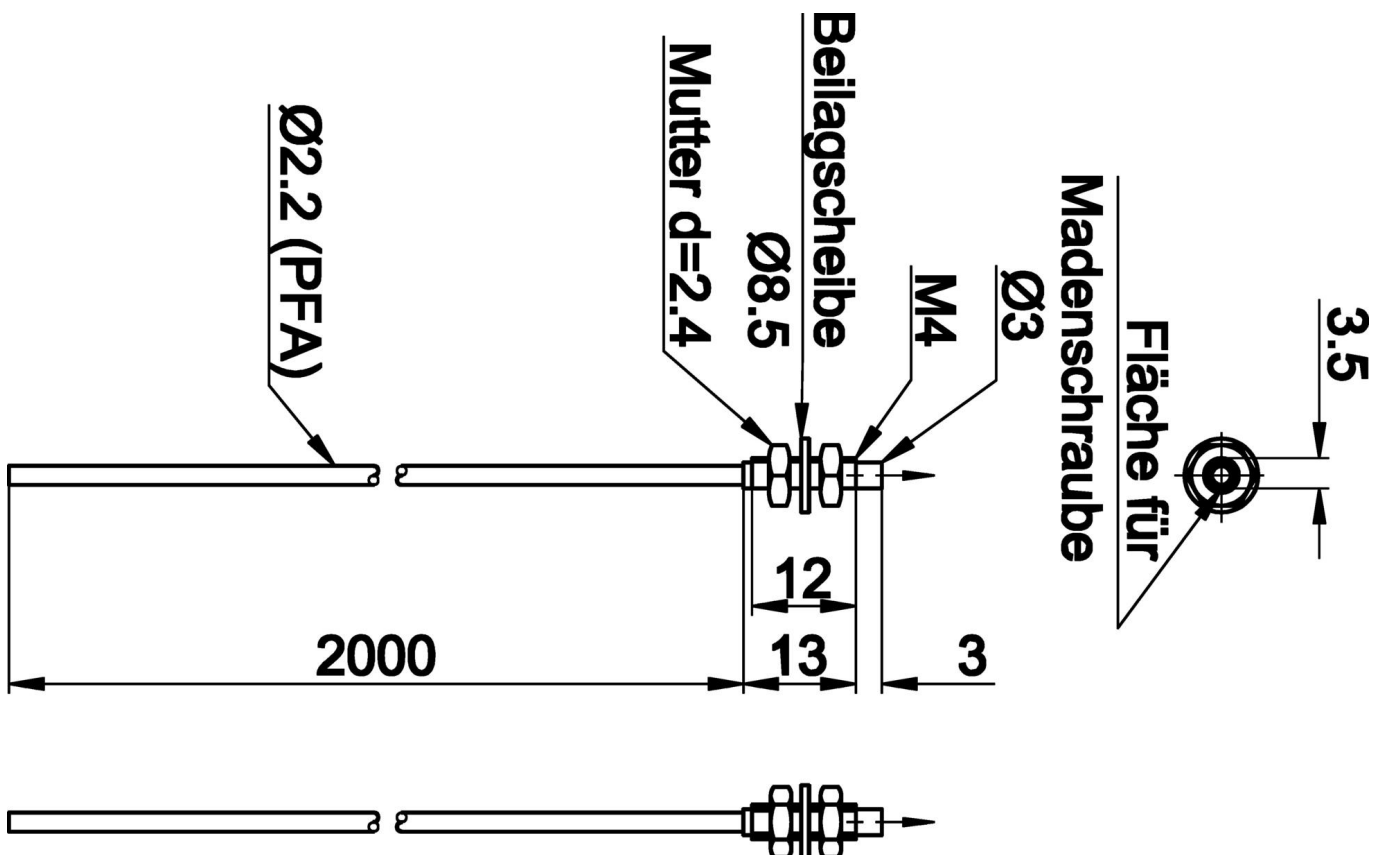

**Extract accessories program****OL100340**

fiber optic-amplifier,  
30x70x10mm, 12-24V DC, 1x PNP  
NC/NO, Plug-in connection 3pin,  
IP40, Plastic, Polarity free red light

**OL100341**

fiber optic-amplifier,  
30x70x10mm, 12-24V DC, 1x PNP  
NC/NO, Plug-in connection 3pin,  
IP40, Plastic ABS, Blue light

**OF500185**

sensor optical, color,  
32x50x50mm, White light, True  
color, Sn: 1-500, 22-26V DC, 2x  
PNP/NPN Push-pull, Connector M8  
4pin, IP64, Aluminum Anodised,  
With fiber optics connection,  $\Delta E$   
 $\geq 0.5$ , 60kHz, 3 colors

**AL000007**

accessories fiber optic, Fiber  
cutter, barrier, diffuse-reflection  
sensor, 13mm high, Cubic,  
Stainless steel

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried  
out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3  
ElektroG: 40951076

**Safety warnings**

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.