

## LS207101

### Fiber optic sensors • Fiber optics plastic fiber barrier

fiber optic barrier, 2m, head: Plastic 20x5x69 line, Light exit Lateral, row 32mm, conductor: Plasticfiber+Plastic, -40-55°C, IP40, small bending radius



Fiber optics in combination with the appropriate fiber optic amplifier function as contactless and wear-free position switches that can also be used in harsh environmental conditions. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). Because the ends and heads of the fiber optics have small dimensions and the fiber optics are flexible, very elegant solutions can be created for detecting objects in places that are difficult to access. Fiber optics can be used without special precautions in potentially explosive areas and in zones with electrical and/or magnetic fields (high-voltage installations, electrical welding equipment) as their function is not thereby affected. Fiber optics are available in versions for implementing the function as through-beam sensor or diffuse reflection sensor.

#### Electrical features

Bending section of the sensing head	0 mm
Bending angle of the sensing head	0 °
Short-circuit protection	No
Sensing head length	20 mm
Switching distance	0 - 3600 mm
Reverse polarity protection	No

**Mechanical features**

Type of fiber	Mono
Design	Cuboid
Bending radius (fixed)	1 mm
Light exit width	3.2
Sensing head width	5 mm
Fiber diameter	1 mm
Fiber optic cable diameter, receiver end	1.3
Fiber optic cable diameter, transmitter end	1.3
Number of fibers	2
Sensing head height	69 mm
Length	2000 mm
Degree of protection (IP)	IP40
Sheathing material	Plastic
Fiber optics core material	Plastic
Sensing head material	Plastic
Light exit height	32
Ejection control	Yes
Design of the fiber optic connection	terminal connection
Ambient temperature	-40 - 55 °C

**Optical features**

Light exit	Lateral, row 32mm
Fiber optic with linear light beam	Yes

**Other features**

Feeding technology	Yes
ardTE00_Anwendungen	Stanzwerkzeuge starke Verschmutzung


**Classification**

ETIM 8	EC002651 Fiber optic sensor/amplifier
--------	---------------------------------------

**More**

IPF Product Group	151 plastic fibers
packaging dimensions	149 x 124 x 28 mm
gross weight	50 g
Customs tariff number	90011090
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

**Dimensional drawing**

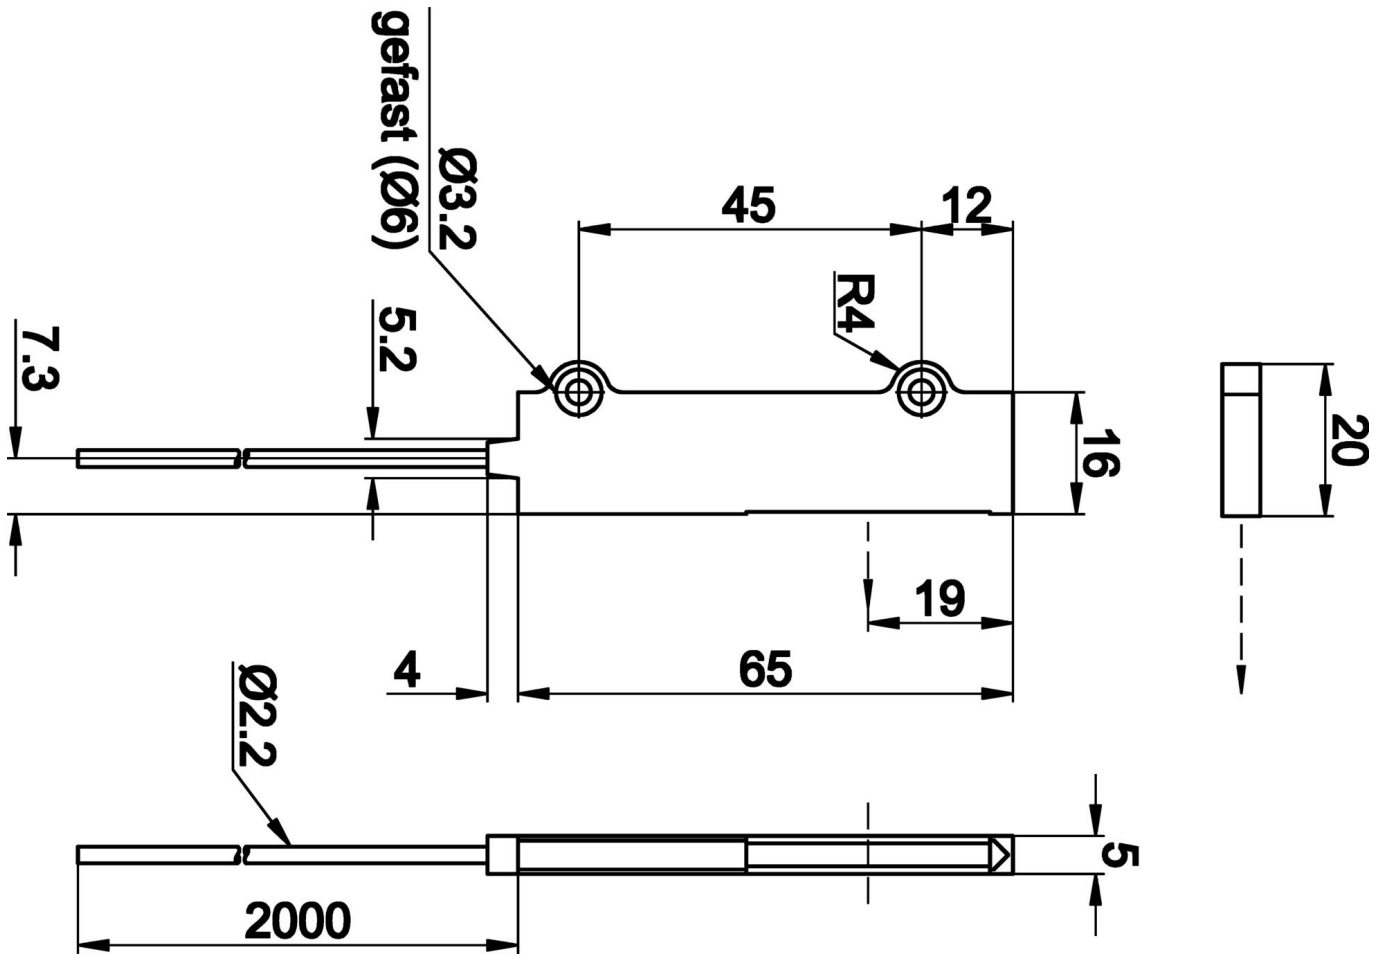

**Extract accessories program**

**AL000007**



accessories fiber optic, Fiber cutter, barrier, diffuse-reflection sensor, 13mm high, Cubic, Stainless steel

**OF500185**



sensor optical, color, 32x50x50mm, White light, True color, Sn: 1-500, 22-26V DC, 2x PNP/NPN Push-pull, Connector M8 4pin, IP64, Aluminum Anodised, With fiber optics connection, ΔE >= 0.5, 60kHz, 3 colors

**OL100340**



fiber optic-amplifier, 30x70x10mm, 12-24V DC, 1x PNP NC/NO, Plug-in connection 3pin, IP40, Plastic, Polarity free red light

**OL100341**



fiber optic-amplifier, 30x70x10mm, 12-24V DC, 1x PNP NC/NO, Plug-in connection 3pin, IP40, Plastic ABS, Blue light

You can find further accessories on our homepage



**Installation**

Mounting / installation may only be carried out by a qualified electrician!



**Disposal**

WEEE number according to § 6 para. 3 ElektroG: 40951076

---

**Safety warnings**

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.