

LS208050

Fiber optic sensors • Fiber optics plastic fiber barrier

fiber optic barrier, 2m, head: Brass 14long M2.6 M2.6x0.45 M4x0.7, Light exit Axial, conductor: Plasticfiber+Plastic, IP67, for attachment optics

including Nut, Toothed washer



Fiber optics in combination with the appropriate fiber optic amplifier function as contactless and wear-free position switches that can also be used in harsh environmental conditions. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). Because the ends and heads of the fiber optics have small dimensions and the fiber optics are flexible, very elegant solutions can be created for detecting objects in places that are difficult to access. Fiber optics can be used without special precautions in potentially explosive areas and in zones with electrical and/or magnetic fields (high-voltage installations, electrical welding equipment) as their function is not thereby affected. Fiber optics are available in versions for implementing the function as through-beam sensor or diffuse reflection sensor.

Electrical features

Bending section of the sensing head	0 mm
Bending angle of the sensing head	0 °
Short-circuit protection	No
Sensing head length	14 mm
Switching distance	0 - 200 mm
Reverse polarity protection	No

Mechanical features

Type of fiber	Mono
Design	Cylinder, screw-thread
Bending radius (fixed)	25 mm
Fiber diameter	1 mm
Fiber optic cable diameter, receiver end	2.2
Fiber optic cable diameter, transmitter end	2.2
Sensing head diameter	2.6 mm
Number of fibers	2
Length	2000 mm
Degree of protection (IP)	IP67
Sheathing material	Plastic
Fiber optics core material	Plastic
Sensing head material	Brass
Ejection control	Yes
Design of the fiber optic connection	terminal connection
Thread dimension of sensing head 1	M2.6
Thread dimension of sensing head	M2.6
Thread dimension of sensing head 2	M4
Ambient temperature	-25 - 70 °C

Optical features

Light exit	axial
Fiber optic for attachment optics	Yes

Other features

Sensing head thread pitch 1	0.45
Sensing head thread pitch 2	0.7
Feeding technology	Yes
Thread dimension of sensing head 1	M2.6
Thread dimension of sensing head 2	M4
ardTE00_Awendungen	Stanzwerkzeuge starke Verschmutzung


Classification

ETIM 8	EC002651 Fiber optic sensor/amplifier
--------	---------------------------------------

More

IPF Product Group	151 plastic fibers
packaging dimensions	123 x 77 x 25 mm
gross weight	40 g
Customs tariff number	90011090
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Dimensional drawing

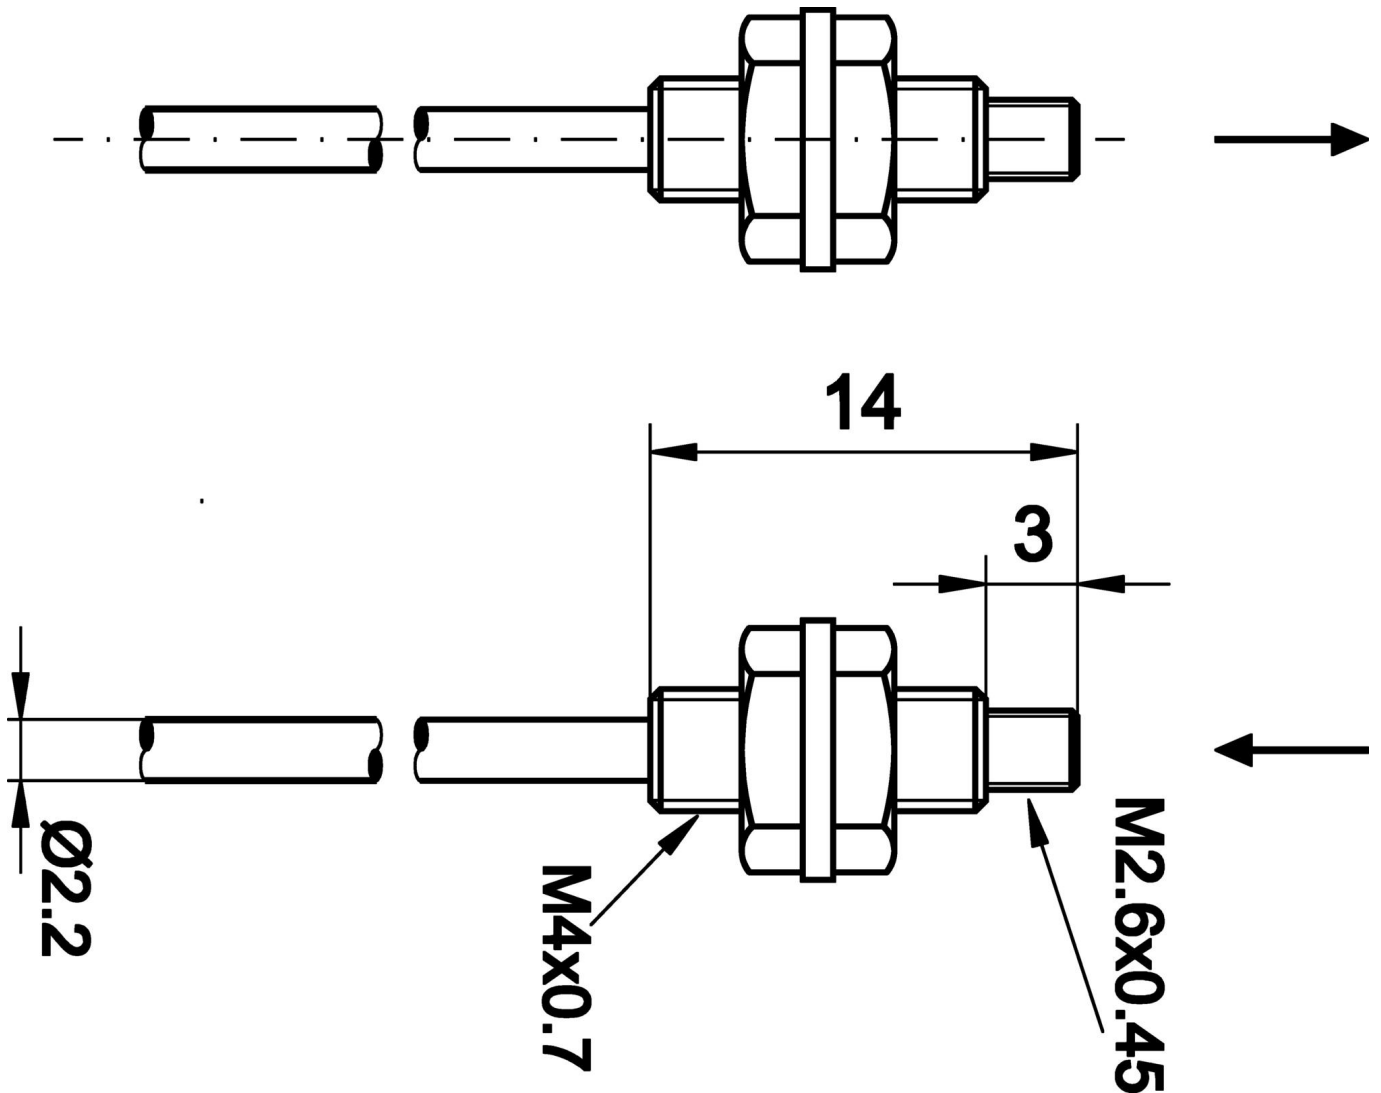

Extract accessories program

OF500185



sensor optical, color,
32x50x50mm, White light, True
color, Sn: 1-500, 22-26V DC, 2x
PNP/NPN Push-pull, Connector M8
4pin, IP64, Aluminum Anodised,
With fiber optics connection, ΔE
>= 0.5, 60kHz, 3 colors

OL100340



fiber optic-amplifier,
30x70x10mm, 12-24V DC, 1x PNP
NC/NO, Plug-in connection 3pin,
IP40, Plastic, Polarity free red light

OL100341



fiber optic-amplifier,
30x70x10mm, 12-24V DC, 1x PNP
NC/NO, Plug-in connection 3pin,
IP40, Plastic ABS, Blue light

AL000007



accessories fiber optic, Fiber
cutter, barrier, diffuse-reflection
sensor, 13mm high, Cubic,
Stainless steel

AL000001



accessories fiber optic, Optic top
part, barrier, M2.6x0.45 8,7long,
Internal thread, Glass

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.