

MZA7E260

Magnetic field sensors • Sensors for T-slot

Sensor Magnetic, cylinder, 6.2mm T-slot, 4.3x19x6.2mm, 10-30V DC, -25-130°C, 1x PNP NO, M8 cable connector 3-pin 1.25m PTFE, IP67, zinc diecast, 2.8mT, installation from above, position of sensor surface center of device



For many tasks in the field of automation technology, it is necessary to recognize the motional processes in pneumatic and hydraulic cylinders and to detect the position of the piston with precision. For this, magnetic cylinder sensors are used.

Electrical features

Number of switching outputs	1
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable connector M8
Type of switching output	PNP
Rated switching current	150 mA
Absolute hysteresis	1 mm
Short-circuit protection	Yes
No-load current	15 mA
Magnetic sensitivity	2.8 mT
Number of pins	3
Switching frequency	1000 Hz
Sensor surface (active)	Middle area
Voltage drop	2 V
Reverse polarity protection	Yes
Absolute repeat accuracy	0.1 mm
Operating voltage (DC)	10 - 30 V
ardSOCA_ElektrischerAnschluss	Cable connector M8 3-pin 1.25m

Mechanical features

Number of cores	3
Design	Cuboid
Width	6.15 mm
Height	4.3 mm
Cable length	1.25 m
Sensor surface position	Center of the device
Length	19 mm
Mounting access, cylinder groove	From the top
Degree of protection (IP)	IP67
Housing material	Zinc die-cast
Material of cable sheath	Plastic (PTFE)
Strong vibration / motion	Yes
Ambient temperature	-25 - 130 °C
Ambient temperature of the connector	-25 - 70 °C
ardSOCA_Abmessungen	19x6.15x4.3mm

Other features

Suitable for	6.2mm T-slot
Cylinder version	With T-groove
Harsh environmental conditions	Yes
Oil and cooling lubricants	Yes

Classification

ETIM 8	EC002544 Magnetic proximity switch
--------	------------------------------------


More

IPF Product Group	222 pneumatic cylinder sensors (high temperature)
packaging dimensions	200 x 150 x 10 mm
gross weight	25 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes


Important notes

/ The output electronics are located in the connector. Do not disconnect the connector!

Connection

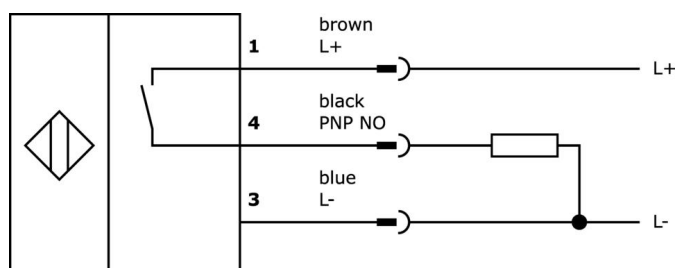

Dimensional drawing

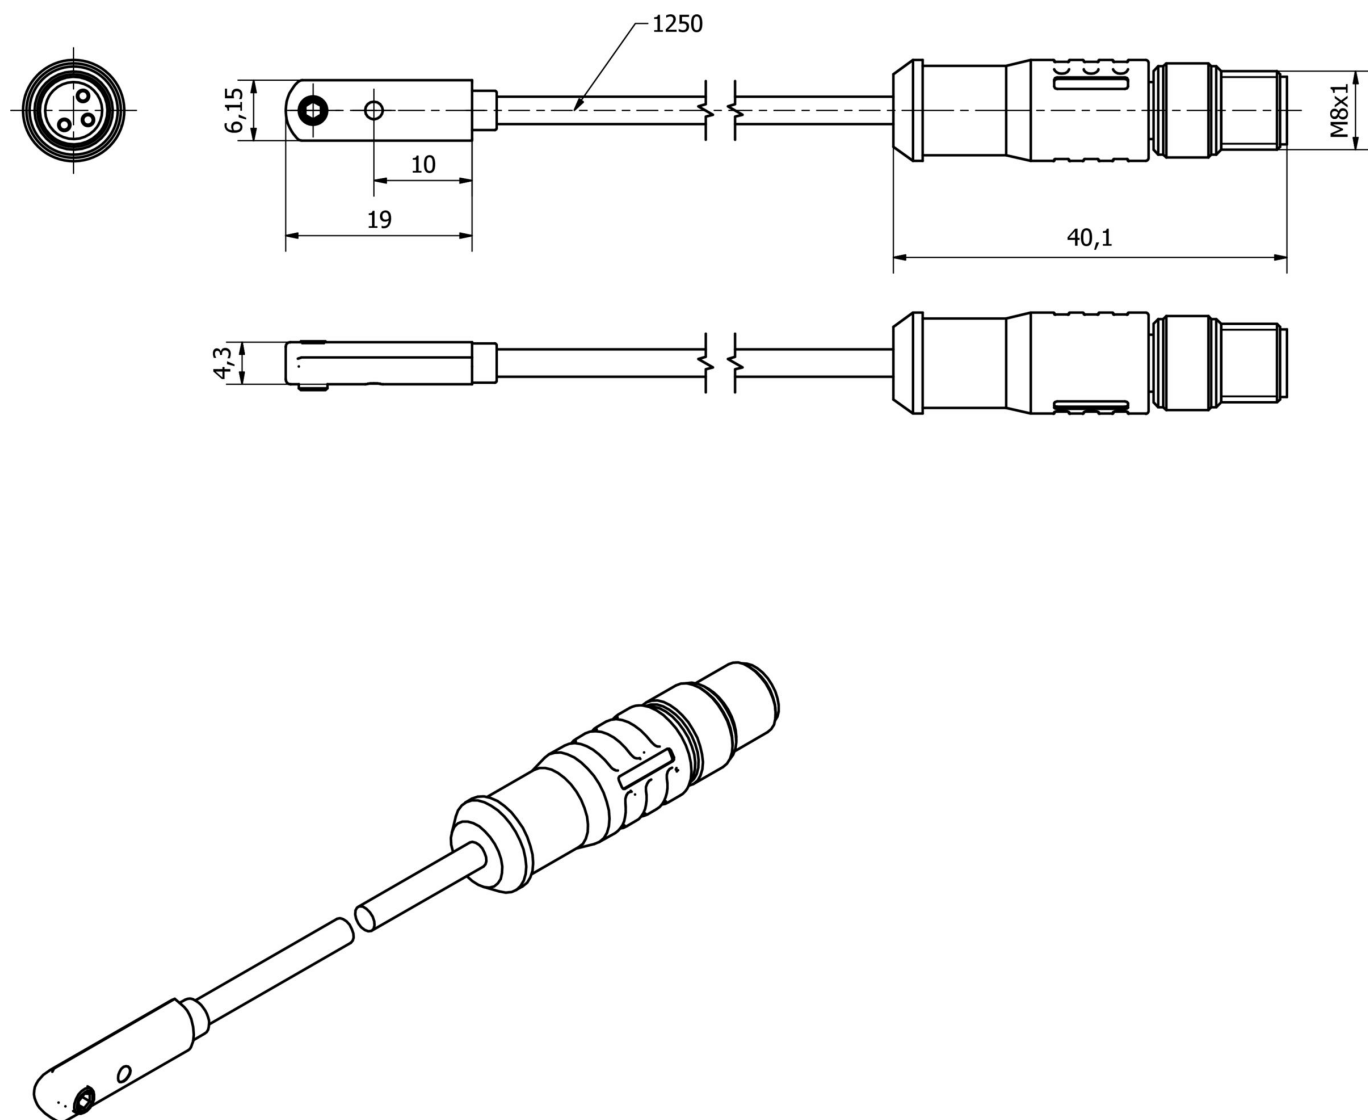

Extract accessories program

NG530002



DC power supply, single-phase,
99x114x22mm, 24V, 0.1A,
Number of relay outputs 2, 100-
264V AC 50Hz, 100-264V AC 60Hz,
Screw connection, IP20, Plastic,
Stabilized, Output voltage, pulsed

AM000076



accessories magnetic, clamp, 4x6,
2x6,2mm, aluminum

AY000141



Plastic sheath, Ø17mm, Inner
diameter 10mm, -40-250°C, Glass
fiber with silicone rubber, Short-
term resistance to weld spatter
1200°C, Tensile strength 400N,
Flexible, Flame retardant, yard
good

AM98E153



accessories magnetic, Installation
tape, 259x9,5mm, Span 35-68mm,
For sensor MZ07, Stainless steel

AM98A882



accessories magnetic, For sensor
MZ07, for Cylinder, Bosch profiled
barrel, Screw mounting

VY030170



time stage, Turn-off delay, 0-0.15s,
10-35V DC, 1x NO, M8 3pin 0.3m,
IP67, Plastic, Potentiometer

VY030174



time stage, Turn-off delay, 0-0.15s,
10-35V DC, 1x NO, M8 3pin 0.3m,
IP67, Plastic, Potentiometer

VY000004



DC power supply, sensor tester,
120x26x72mm, 18V, 0.04A, Spring
clamp connection 4pin, IP20,
Plastic

VYR90270



Signal inversion, Ø9mm 32long,
10-35V DC, 1x NC, M8 0.3m, IP67,
Aluminum

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried
out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.