

# NZ60KE11

## Measuring transducer • Current transformer

current transformer, 60x96x75mm, primary 150A, 4-20mA, cable 2,5m, IP30, plastic



Current transformer with integrated measuring transformer. Output signal 4-20mA

### Electrical features

Type of analog output	4 - 20mA
Type of electrical connection	Cable
Operating frequency	50 - 60 Hz
Primary rated current I <sub>n</sub>	150 A

### Mechanical features

Width	59.2 mm
Height	96.4 mm
Cable length	2.5 m
Storage temperature	-25 - 70 °C
Length	75 mm
Mounting method	Direct mounting
Degree of protection (IP)	IP30
Housing material	Polyamide PA
Ambient temperature	-5 - 50 °C


### Classification

ETIM 8
--------


### More

IPF Product Group	400 power supply units
packaging dimensions	
gross weight	
Customs tariff number	85043129
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection**

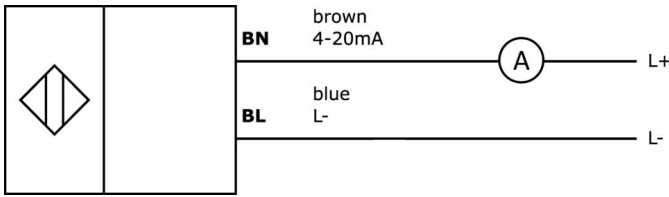

**Dimensional drawing**

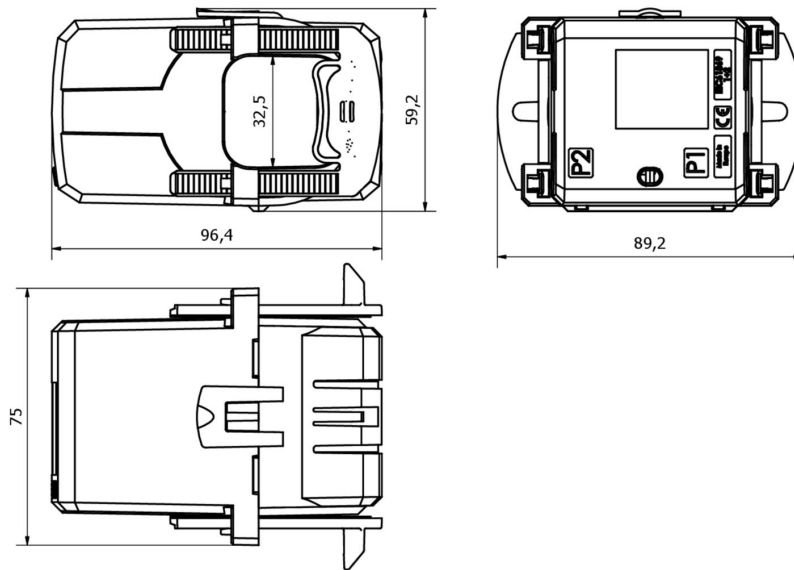

**Installation**

Mounting / installation may only be carried out by a qualified electrician!



**Disposal**

WEEE number according to § 6 para. 3  
 ElektroG: 40951076

**Safety warnings**

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.