

OE080100

Optical sensors • Through-beam sensors receivers

sensor optical, Through-beam sensor receiver, M8x0.75 59long, Sn: 2.5m, 10-30V DC, PNP NO (NO), Cable 3pin 2m PVC, IP65, Brass Nickel-plated+Plastic PC, Infrared light

including 2x Nut



Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

Electrical features

Response/decay time	2.5ms
Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	100mA
Short-circuit protection	Yes
No-load current	24mA
No-load current, receiver	24mA
Line diameter	2.8mm
Number of pins	3
Switching distance	0 - 2500mm
Switching frequency	200Hz
Voltage drop	2V
Scanning function	Dark switching
Reverse polarity protection	Yes
Decay time	2.5ms
Operating voltage (DC)	10 - 30V

Mechanical features

Wire cross section	0.14mm ²
Design	Cylinder, screw-thread
Housing coating	nickel-plated
Thread length	48mm
Thread pitch	0.75mm
Cable length	2m
Length	59mm
Degree of protection (IP)	IP65
Material of optical surface	Plastic PC
Housing material	Brass
Material of cable sheath	PVC
Thread dimension	M8
Ambient temperature	-25 - 65°C

Optical features

Light source	Infrared light
Light beam form	Point
Wavelength of the sensor	880nm

Other features

Scope of delivery	Receiver
Version	Through-beam sensor receiver
Ambient temperature	-25 - 65°C


Classification

ETIM 8	EC002716 Through-beam photoelectric sensor
eClass 7.0	27270901
eClass 7.1	27270901
eClass 8.0	27270901
eClass 9.0	27270901
eClass 9.1	27270901

More

IPF Product Group	100 optical sensors
packaging dimensions	123 x 77 x 25 mm
gross weight	64 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

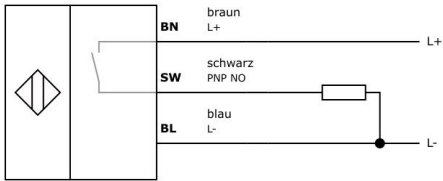

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

