

OE120106

OPTICAL SENSORS • THROUGH-BEAM SENSORS RECEIVERS

sensor optical, Through-beam sensor receiver, M12x1 50long, Sn: 10m, 10-35V DC, PNP NO (NO), Cable 3pin 2m PVC, IP67, Brass Chrome-plated+Glass, Polarity free red light



MECHANICAL FEATURES

Ambient temperature	-25 °C ... 55 °C
Cable length	2 m
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
Housing coating	Chrome-plated
Housing material	Brass
Material of cable sheath	PVC
Material of optical surface	Glass
Max. tightening torque	10 Nm
Sensor length	50 mm
Thread length	50 mm
Thread pitch	1 mm
Thread size, metric	12
Version	Through-beam sensor receiver
Wire cross section	0.34 mm ²

ELECTRICAL FEATURES

Connection to amplifier	-
Decay time	0.5 ms
Measuring range	10 m
No-load current	15 mA
No-load current, receiver	15 mA
Number of pins	3
Operating voltage	10 V ... 35 V
Rated switching current	200 mA
Rated switching distance	10000 mm
Readiness delay	20 ms
Residual ripple	20 %
Response time	0.5 ms
Reverse polarity protection	+
Scanning function	Dark switching
Short-circuit protection	+
Switching frequency	1000 Hz

ELECTRICAL FEATURES

Type of electrical connection	Cable
Type of switching function	Normally open contact (NO)
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With LED display	+
With LED display (functional reserve)	+
With LED display (signal)	+
With time function	-

OPTICAL FEATURES

Light source	Polarity free red light
Wavelength of the sensor	660 nm
Light beam form	Point

OTHER FEATURES

Scope of delivery of the one-way system	Receiver
---	----------


Other

Packaging dimensions	77.0mm x 25.0mm x 123.0mm
Shipping weight	0.11kg
Tariff code	85365019


Classification

ipf product group	100
eClass 8.0	27270901
eClass 9.0	27270901
eClass 9.1	27270901
ETIM-5.0	EC002716
ETIM-6.0	EC002716
ETIM-7.0	EC002716

Connection

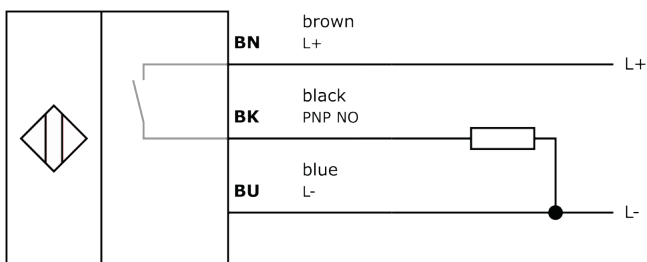

Dimensional drawing

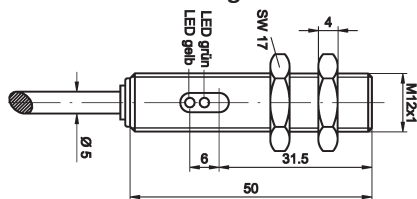

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.