

OG900572

Optical sensors • Forked light barriers

sensor optical, fork, 110x10x80mm, fork width 90mm, 10-30V DC, 1x PNP/NPN NC/NO, IO-Link, Connector M8 3pin, IP67, Aluminum+Glass, Red light, 5kHz pulsed, Manual adjustment



Special design of through-beam sensor. Transmitter and receiver are located in the fork or angular limbs and are perfectly aligned to each other.

Electrical features

Response/decay time	0.1 ms
Number of switching outputs	1
Resolution	0.3 mm
Type of the forked light barrier	Standard
Type of switching function	Normally closed contact/normally open contact
Type of electrical connection	Connector M8
Type of switching output	PNP/NPN
Rated switching current	100 mA
Setting procedure	Potentiometer
Short-circuit protection	Yes
No-load current	30 mA
Number of pins	3
Repeatability +/-	20 µm
Switching frequency	5000 Hz
Protection class	III
Scanning function	Light-/dark-on mode
Reverse polarity protection	Yes
Decay time	0.1 ms
Absolute repeat accuracy	0.02 mm
Supported communication interface	IO-Link
Operating voltage (DC)	10 - 30 V
Output functions	Switching point

Mechanical features

Design	Cuboid
Fork light barrier design	Furcate
Width	80 mm
Fork depth	55 mm
Fork width	90 mm
Height	110 mm
Length	10 mm
Degree of protection (IP)	IP67
Active area material of sensor	glass
Housing material	Aluminum
Ambient temperature	-25 - 60 °C

Optical features

Light source	red light
Light beam form	Point
Min. object size	0.3 mm
Wavelength of the sensor	660 nm
Pulsed light source	Yes

Other features

IO-Link version	V1.1
Feeding technology	Yes


Classification

ETIM 8	EC002720 Fork light barrier
--------	-----------------------------


More

IPF Product Group	110 fork / angular light barriers
packaging dimensions	160 x 150 x 10 mm
gross weight	75 g
Customs tariff number	85365019
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

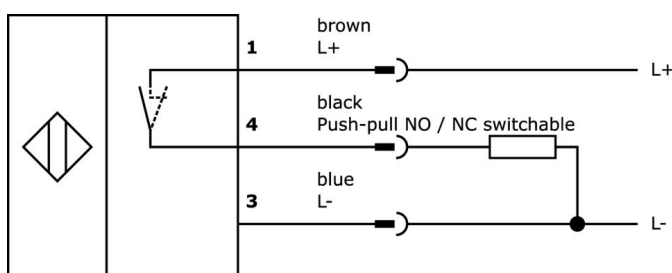


Dimensional drawing

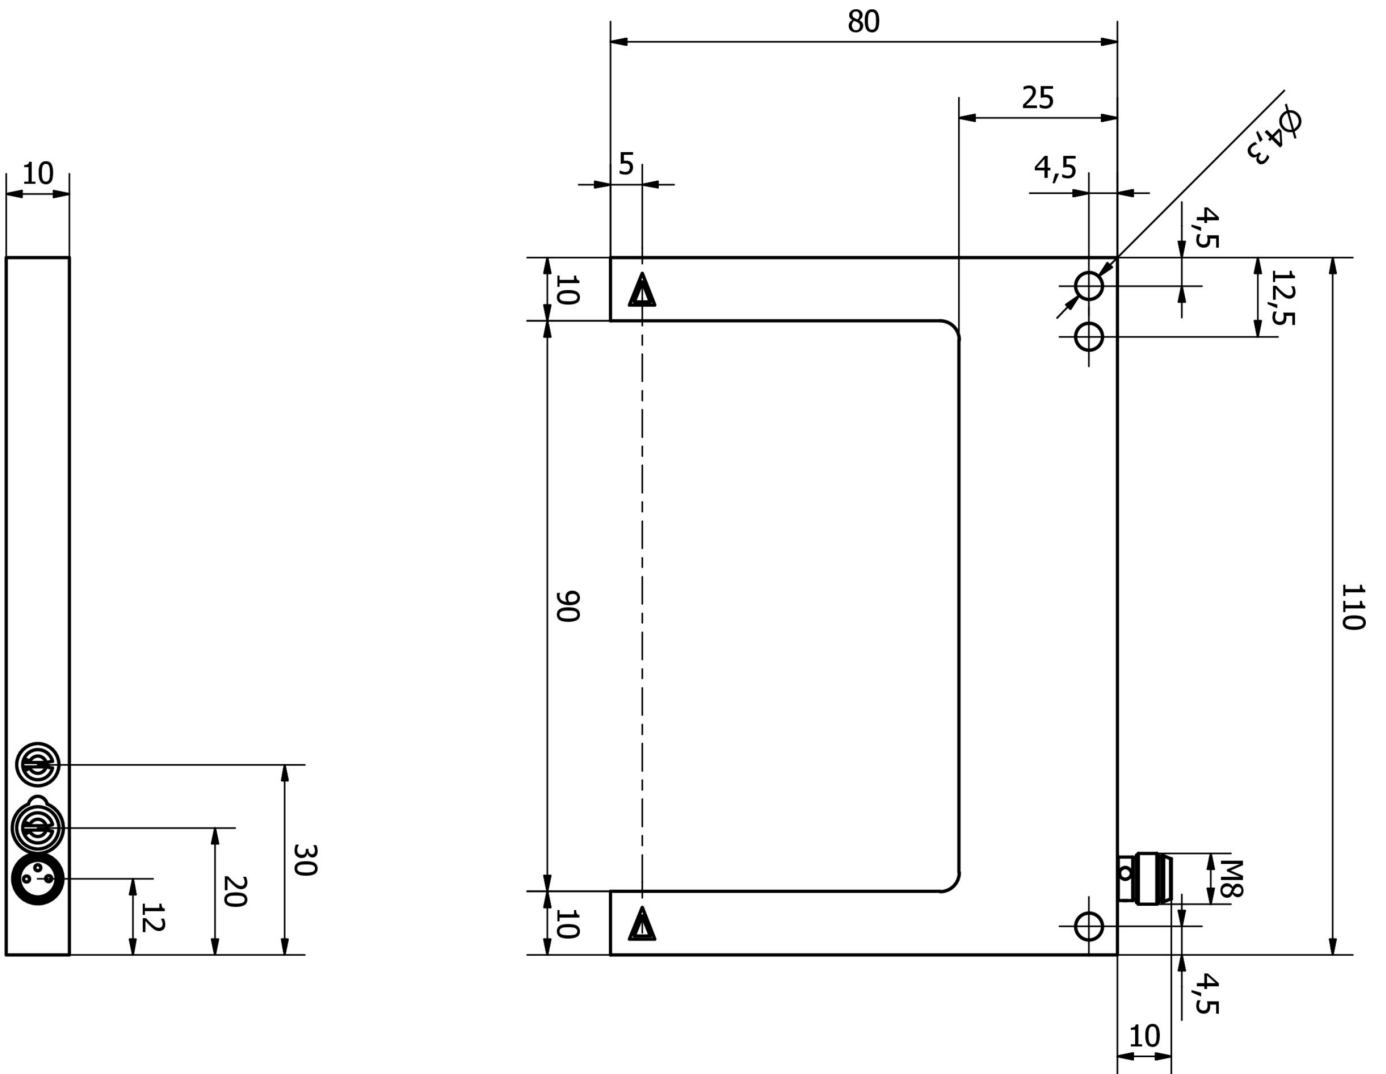


Extract accessories program


VK030F70

 Connection cable, 0.3m, M8 socket 3-pin angular, M8 connector 3-pin straight, 3x0.34mm², PUR (polyurethane), 60V, IP67, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free


VK030F74

 Connection cable, 0.3m, M8 socket 3-pin straight, M8 connector 3-pin straight, 3x0.34mm², PUR (polyurethane), 60V, IP67, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VK000038

 Adaption, M8 Female (socket) 3pin Straight, M8 Male (connector) 4pin Straight, 24V, -25-85°C, IP67, Oil and cooling lubricants, Welding area


VK000036

 Adaption, M8 Female (socket) 3pin Straight, M12 Male (connector) 3pin Straight, 24V, -25-85°C, IP67, Oil and cooling lubricants, Welding area


AY98C293

 accessories sensor, Teflon cap, M8x1 5long, Polytetrafluorethylene (PTFE)

VL300138

 Logic module, 26x136x30mm, OR, 2x4fold, 10-30V DC, sensor side M8 Female (socket) 3pin, control side M12 Male (connector) 12pin, IP67, Plastic


VL300148

 Logic module, 26x136x30mm, AND, 4fold, 10-30V DC, sensor side M8 Female (socket) 3pin, control side M12 Male (connector) 12pin, IP67, Plastic, Signal change logic

VK003070

 Cable socket, Angular, Suitable for self-assembly, Soldering connection, Ø3.5-5mm, 4A, 60V, -40-85°C, M8 Female (socket) 3pin, IP67, Brass

VK003074

 Cable socket, Straight, Suitable for self-assembly, Soldering connection, Ø3.5-5mm, 4A, 60V, -40-85°C, M8 Female (socket) 3pin, IP67, Brass

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3 ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.

/ Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com