

OR450521

Optical sensors • Retro-reflective sensors

Optical sensor, reflex, 56x32x18 mm, polarized red light, spot, teach-in, SN: 7500, 10–30 V DC, PNP/NPN exclusive-OR, 4-pin M12 connector, IP67, ASA+PMMA plastic, with polarizing filter



Optical sensors operate contactless. They detect objects regardless of their characteristics (e.g., shape, color, surface texture, material). Their basic principle of operation is based on the transmission and reception of light. There are three versions: 1. The through-beam sensor consists of two separate devices—a transmitter and a receiver—that are aligned with each other. When the light beam between the two devices is interrupted, the switching output integrated into the receiver changes its status. 2. In a reflective light barrier, the transmitter and receiver are housed in a single device. The transmitted light beam is reflected toward the receiver by a reflector mounted opposite it. As soon as the light beam is interrupted, the switching output integrated into the device changes its status. 3. In a diffuse reflection sensor, the transmitter and receiver are housed in a single device. The emitted light beam is reflected by the object to be detected. As soon as the receiver detects the reflected light, the switching output integrated into the device changes its status.

Electrical features

Response/decay time	0.49 ms
Display	LED display
Type of switching function	Exclusive-OR Normally closed (n.o. for PNP) Normally closed (n.c. for NPN) - Adjustable
Type of electrical connection	Connector M12
Type of switching output	Push-pull
Rated switching current	100 mA
Setting procedure	Teach-In
No-load current	35 mA
Number of pins	4
Switching distance	0 - 7500 mm
Switching frequency	1000 Hz
Voltage drop	3 V
Scanning function	Light-/dark-on mode
Decay time	0.49 ms
Operating voltage (DC)	10 - 30 V
Adjustable output functions	Switching point
protection functions	short circuit protection reverse polarity protection

Mechanical features

Design	Cuboid
Width	18 mm
Height	56.2 mm
Length	32.25 mm
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PMMA)
Housing material	plastic ASA
Ambient temperature	-25 - 60 °C

Optical features

Light source	Polarized red light
Light beam form	Point
Wavelength of the sensor	630 nm

Other features

Range of functions	interference suppression
Reference medium / object	AO000007


Classification

ETIM 8


More

IPF Product Group	100 optical sensors
packaging dimensions	123 x 77 x 25 mm
gross weight	40 g
customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

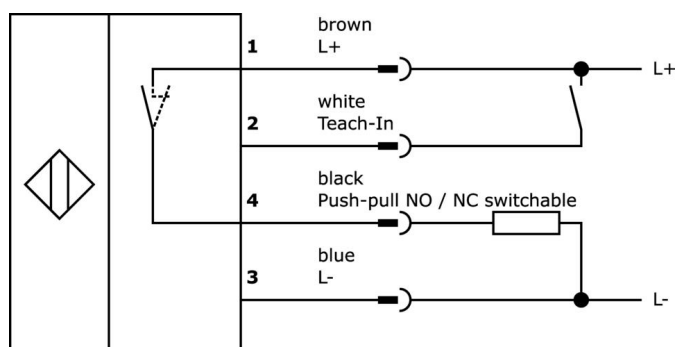

Dimensional drawing

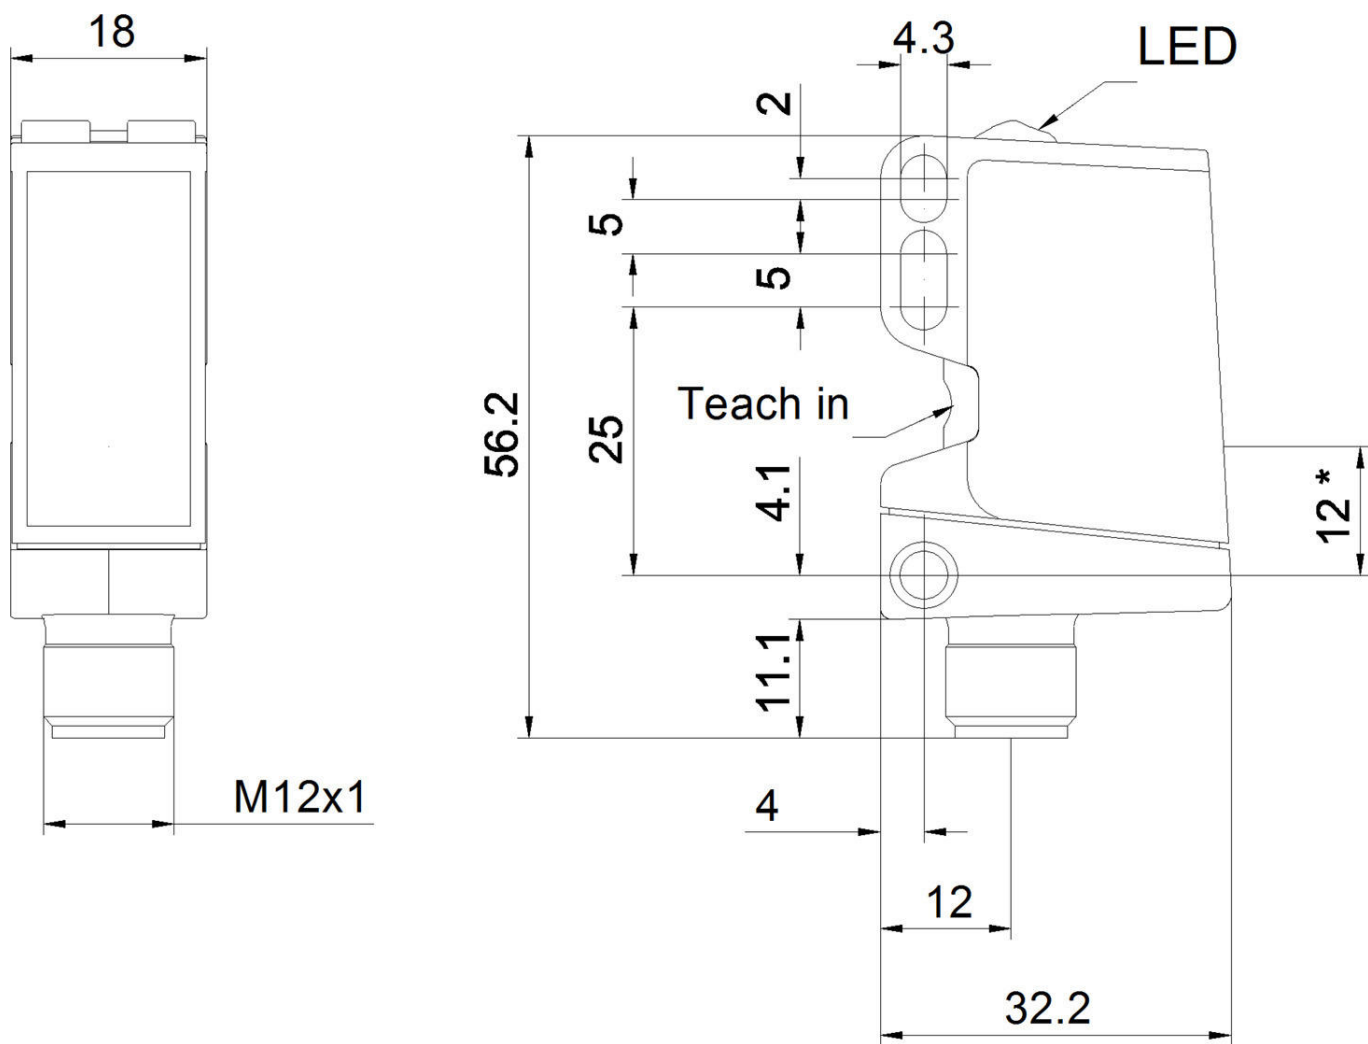

Extract accessories program

VK200421



Connection cable, 2m, M12 socket 4-pin angular, free cable end, 4x0.34mm², PUR (polyurethane), Ø4.7mm, -30-90°C, IP67, LED, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VK500421



Connection cable, 5m, M12 socket 4-pin angular, free cable end 4-pin, 4x0.34mm², PUR (polyurethane), Ø4.7mm, -30-90°C, IP67, LED, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VK003020



Cable socket, angular, self-assembly, screw connection, Ø3-6.5mm, 4A, 240V, -25-90°C, M12 socket 4-pin, IP67, PBT

VK003024



Cable socket, Straight, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 240V, -25-90°C, M12 Female (socket) 4pin, IP67, PBT

AO000004



accessories optical, reflector, Ø20mm 6high, Self-adhesive, PMMA+PMMA, Polarized

AO000005



accessories optical, reflector, Ø40mm 7high, Self-adhesive, PMMA+PMMA, Polarized

VK030F23



Connection cable, 0.3m, M12 socket 4-pin angular, M12 connector 4-pin straight, 4x0.34mm², PUR (polyurethane), IP67, LED, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VK030F26



Connection cable, 0.3m, M12 socket 4-pin straight, M12 connector 4-pin straight, 4x0.34mm², PUR (polyurethane), IP67, LED, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VK003021



Cable socket, Angular, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 60V, -25-90°C, M12 Female (socket) 5pin, IP67, PBT

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.