

OV580940

High performance light barriers • Amplifier

High-power photoelectric sensor amplifier, 76x78x40mm, 2x multiplex, 24V, NO, plug connection 11-pin, IP40, plastic



The article OV580940 is an amplifier with two channels that belongs to the subgroup "Amplifiers". As part of the "high performance light barriers" subgroup, this amplifier is designed for extreme performance and reliability. With its ability to distinguish between operated light barriers in close proximity, it allows for flexible installation. The amplifier can reach ranges of up to 40000mm, making it ideal for demanding applications. Its robustness and insensitivity to dirt make it particularly suitable for industrial environments such as the wood and paper industry, vehicle washing systems, bulk material control and more. The simple installation and handling underline the high user-friendliness of this product.

Electrical features

Number of presets to be set	4
Number of channels	2
Number of switching outputs	2
Number of normally open contacts	2
Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Plug-in connection
Type of switching output	Relay contact
Rated switching current	5000 mA
Input voltage tolerance	20 %
No-load current	83 mA
Power consumption	2 VA
Number of pins	11
Switching distance	0 - 40000 mm
Switching capacity	120 VA
Switching voltage	24 V
Switching voltage AC	230 V
Switching voltage DC	24 V
Operating voltage (DC)	19,2 - 28,8 V
With soiling compensation	Yes

Mechanical features

Design	Cuboid
Width	40 mm
Height	76.5 mm
Length	78.5 mm
Mounting method	Relay base
Degree of protection (IP)	IP40
Housing material	Plastic
Ambient temperature	-25 - 50 °C

Optical features

Range (transmitter with increased power, receiver with short design)	9
Range (transmitter with increased power, receiver with normal design)	20
Range (transmitter with maximum power, receiver with short design)	15
Range (transmitter with maximum power, receiver with normal design)	40
Range (transmitter with normal power, receiver with short design)	7
Range (transmitter with normal power, receiver with normal design)	13


Classification

ETIM 8	EC001485 Isolation amplifier
--------	------------------------------


More

IPF Product Group	101 high performance through-beam sensors and amplifiers
packaging dimensions	120 x 80 x 45 mm
gross weight	186 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

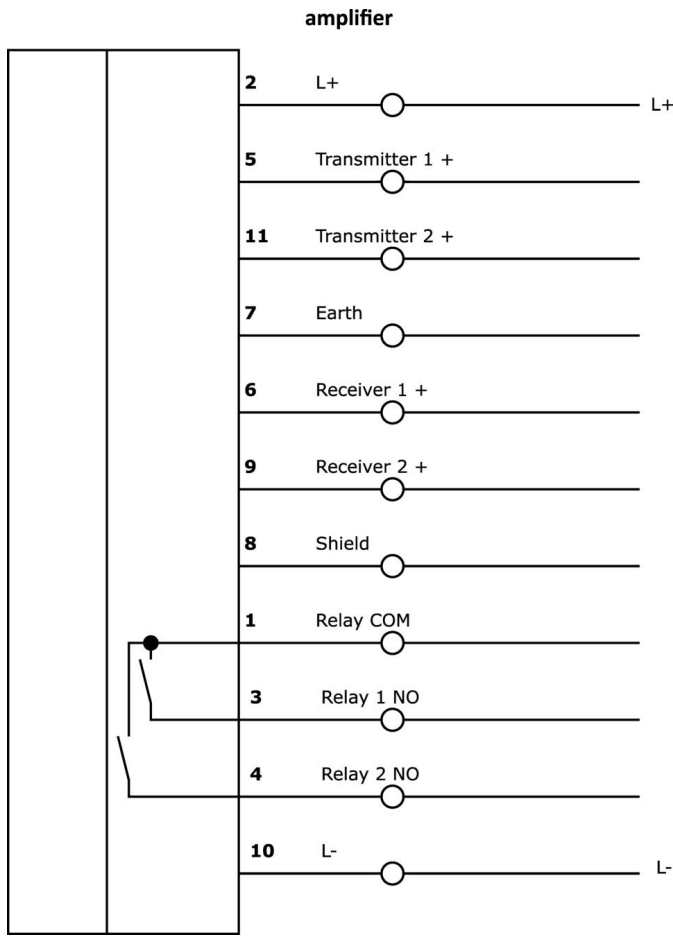

Dimensional drawing

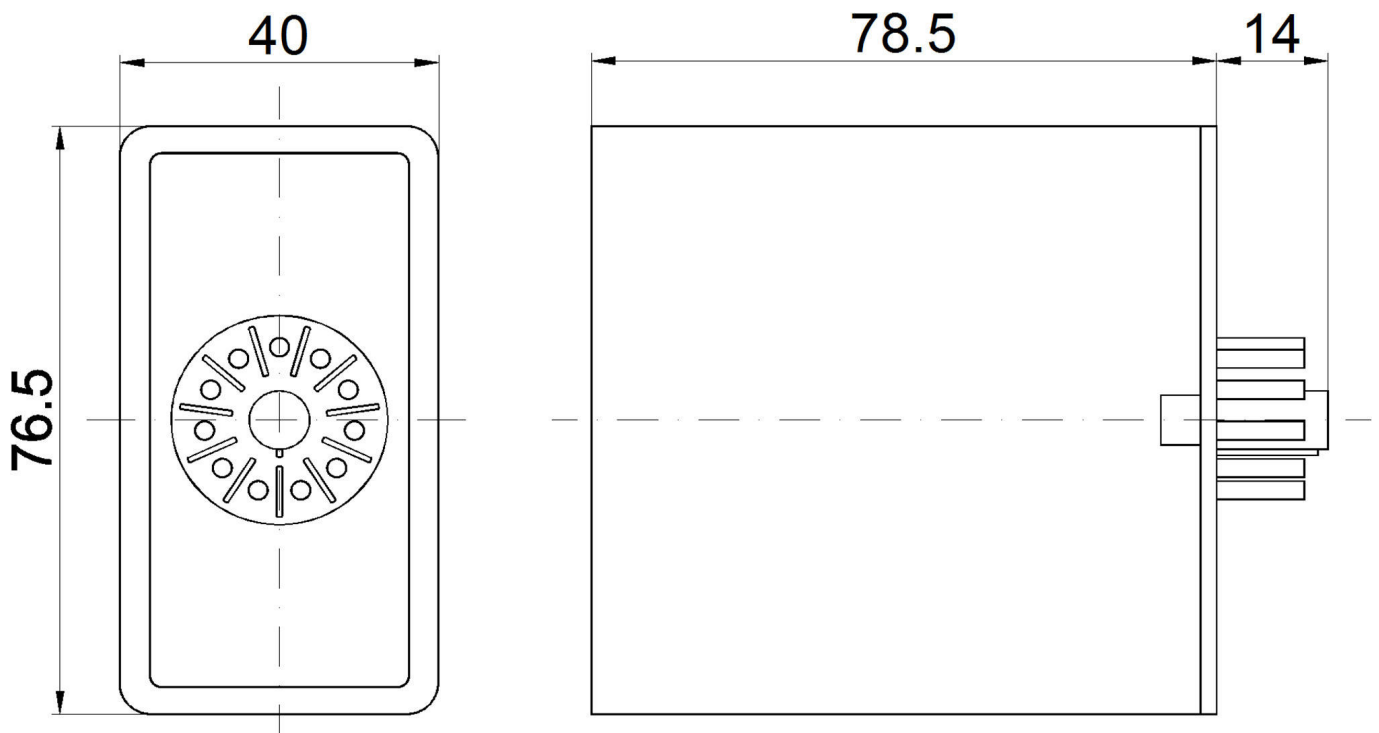

Extract accessories program

OS106001



High-power photoelectric sensor transmitter, Ø10mm 45long, normal power (40mW), 12°, connection to amplifier, cable tail 5m PVC, IP67, plastic+plastic

OS106003



High-power photoelectric sensor transmitter, Ø10mm 45long, normal power (40mW), 12°, connection to amplifier, cable tail 15m PVC, IP67, plastic+plastic

OE106001



High-power photoelectric sensor receiver, Ø10mm 45long, standard design, connection to amplifier, cable tail 2-pin 5m PVC, IP67, plastic+plastic

OE106003



High-performance photoelectric sensor receiver, Ø10mm 45long, standard design, connection to amplifier, 2-pin cable tail 15m PVC, IP67, plastic+plastic

AV000004



accessories, Relay socket, Plug-in end socket, 27x67x38mm, 250V, Screw connection 11pin, IP20, Plastic, DIN rail (top hat rail) 35 mm

AV000042



Accessories for switching relays, Spring clip, Steel

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3 ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.