

OY98C886

Optical sensors • Through-beam sensors

Optical sensor, light barrier, M4x0.7, 14 long, sensing distance: 0.5 m, 12–24 V DC, PNP NC, 2 m PVC cable, IP67, nickel-plated (n-pltd) PC plastic + PC plastic, unpolarized red light

including Nut, Transmitter and receiver, Toothed washer



Optical sensors operate contactless. They detect objects regardless of their characteristics (e.g., shape, color, surface texture, material). Their basic operating principle is based on the transmission and reception of light. There are three versions: 1. The through-beam sensor consists of two separate devices—a transmitter and a receiver—that are aligned with each other. When the light beam between the two devices is interrupted, the switching output integrated into the receiver changes its status. 2. In a reflective light barrier, the transmitter and receiver are housed in a single device. The transmitted light beam is reflected toward the receiver by a reflector mounted opposite it. As soon as the light beam is interrupted, the switching output integrated into the device changes its status. 3. In a diffuse reflection sensor, the transmitter and receiver are housed in a single device. The emitted light beam is reflected by the object to be detected. As soon as the receiver detects the reflected light, the switching output integrated into the device changes its status.

Electrical features

Response/decay time	0.5 ms
Display	LED display
Type of switching function	Normally closed contact (NC)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	50 mA
Setting procedure	Manual adjustment
No-load current, receiver	10 mA
No-load current, transmitter	10 mA
Residual ripple	10 %
Switching distance	0 - 500 mm
Switching frequency	1000 Hz
Voltage drop	2 V
Scanning function	Light-/dark-on mode
Decay time	0.5 ms
Absolute repeat accuracy	0.05 mm
Operating voltage (DC)	12 - 24 V
protection functions	short circuit protection reverse polarity protection

Mechanical features

Number of cores	3
Conductor cross-section	0.1 mm ²
Design	Cylinder, screw-thread
Thread length	7 mm
Thread pitch	0.7 mm
Cable length	2 m
Storage temperature	-30 - 70 °C
Length	14 mm
Surface	nickel-plated
Wrench size	14 mm
Shock resistance	50 g
Degree of protection (IP)	IP67
Vibration resistance	500 Hz
Active area material of sensor	Plastic (PC)
Housing material	plastic PC
material of cable sheath	plastic (PVC)
Working distance range	0 - 500 mm
Thread dimension	M4
Ambient temperature	-25 - 55 °C
Line diameter	2.5 mm

Optical features

Light source	Polarity free red light
Light beam form	Point
Wavelength of the sensor	660 nm

Other features

Version	Light barrier
---------	---------------


Classification

ETIM 8

More

IPF Product Group	100 optical sensors
packaging dimensions	123 x 77 x 25 mm
gross weight	60 g
customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

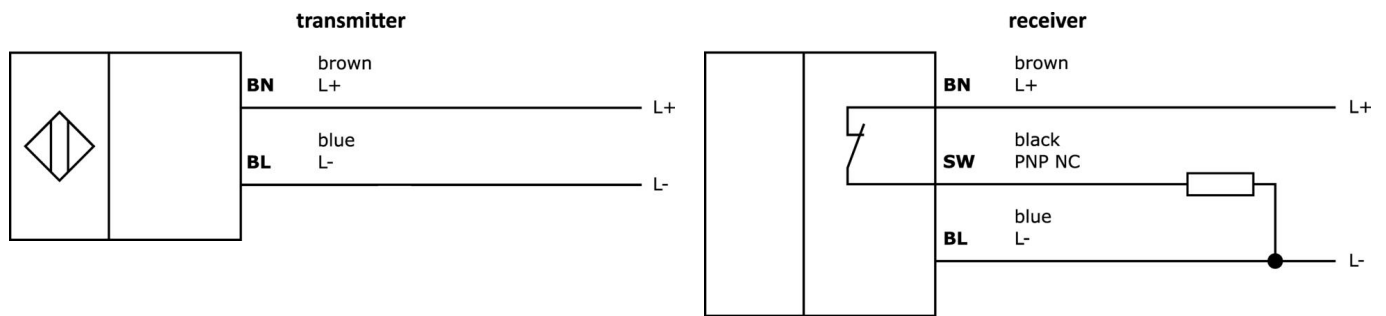

Extract accessories program

AY000141



Plastic sheath, Ø17mm, Inner diameter 10mm, -40-250°C, Glass fiber with silicone rubber, Short-term resistance to weld spatter 1200°C, Tensile strength 400N, Flexible, Flame retardant, yard good

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3 ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.