

OYQ30100

Optical sensors • Through-beam sensors

Sensor Optical, light barrier, 10x3.5x14mm, Sn: 0.15m, 12-24V DC, PNP NO, cable tail 2m PVC, IP67, plastic PET+polyalylate, red light unpolarized

including Nut, Screw, Transmitter and receiver, Washer



Optical sensors work contactless. They detect objects, regardless of their properties (e.g. shape, color, surface structure, material). The basic mode of operation is based on the transmitter and receiver of light. There are three different versions: 1. the through-beam sensor consists of two separate devices, a transmitter and a receiver, which are aligned with each other. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. in the reflex light barrier, the transmitter and receiver are located in one device. The transmitted light beam is reflected onto the receiver by a reflector to be mounted opposite. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. the diffuse reflection sensor has a transmitter and receiver in one device. The transmitted light beam is reflected by the object to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

Electrical features

Response/decay time	0.5 ms
Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	50 mA
No-load current, receiver	15 mA
No-load current, transmitter	10 mA
Residual ripple	10 %
Switching distance	0 - 150 mm
Switching frequency	1000 Hz
Voltage drop	2 V
Scanning function	Dark switching
Decay time	0.5 ms
Absolute repeat accuracy	0.05 mm
Operating voltage (DC)	12 - 24 V
ardTEEL_Schutzfunktionen	Short circuit protection Reverse polarity protection

Mechanical features

Number of cores	3
Conductor cross-section	0.1 mm ²
Design	Cuboid
Width	14.5 mm
Height	10 mm
Cable length	2 m
Storage temperature	-30 - 70 °C
Length	3.5 mm
Shock resistance	50 g
Degree of protection (IP)	IP67
Vibration resistance	500 Hz
Active area material of sensor	Plastic (PAR)
Housing material	Plastic PET
Material of cable sheath	Plastic (PVC)
Working distance range	0 - 150 mm
Ambient temperature	-25 - 55 °C
Line diameter	2.5 mm

Optical features

Light source	Polarity free red light
Light beam form	Point
Wavelength of the sensor	680 nm

Other features

Version	Light barrier
---------	---------------


Classification

ETIM 8


More

IPF Product Group	100 optical sensors
packaging dimensions	123 x 77 x 25 mm
gross weight	60 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

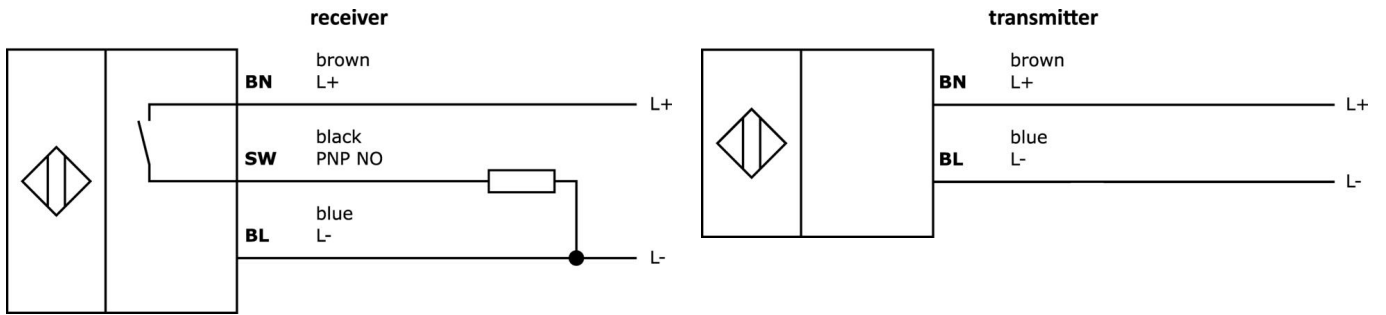

Dimensional drawing

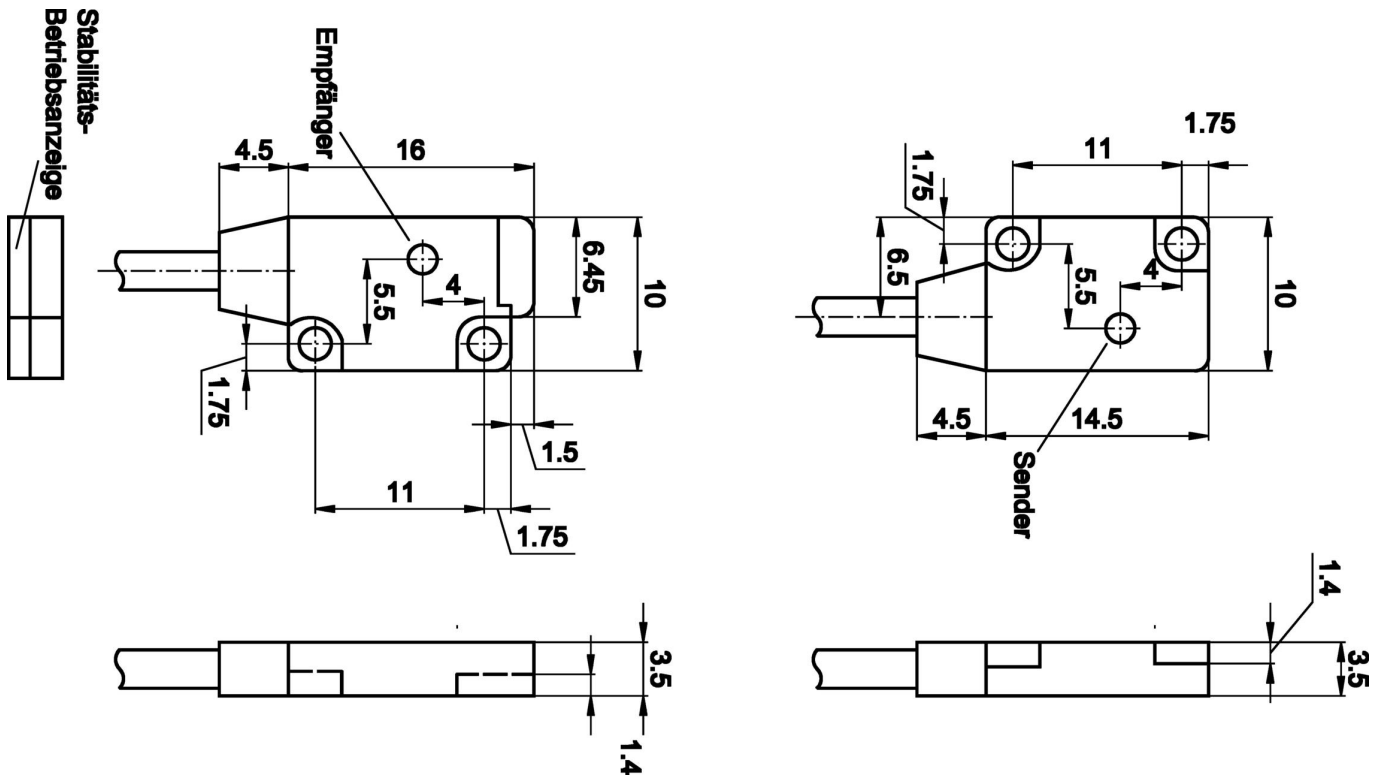

Extract accessories program

AY000141



Plastic sheath, Ø17mm, Inner diameter 10mm, -40-250°C, Glass fiber with silicone rubber, Short-term resistance to weld spatter 1200°C, Tensile strength 400N, Flexible, Flame retardant, yard good

AO000077



accessories optical, Mounting angle bracket, M2x0.4 22long, Mounting material for sensor, brackets, Steel

AO000078



accessories optical, Mounting angle bracket, M2x0.4 10long, Mounting material for sensor, brackets, Steel

VK003076



Cable connector, Angular, Suitable for self-assembly, Soldering connection, 4A, 60V, -40-85°C, M8 Male (connector) 3pin, IP67, Brass

VK003078



Cable connector, Straight, Suitable for self-assembly, Soldering connection, Ø3.5-5mm, 4A, 60V, -40-85°C, M8 Male (connector) 3pin, IP67, Brass

VK003026



Cable connector, Angular, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 240V, -25-90°C, M12 Male (connector) 4pin, IP67, PBT

VK003028



Cable connector, Straight, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 240V, -25-90°C, M12 Male (connector) 4pin, IP67, PBT

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3 ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.