

PSSI0006

Laser sensors • Through-beam sensors transmitters

sensor laser, through-beam transmitter, M18x1 90long, aperture 6.5x0.8mm, Sn: 2.5m, 12-32V DC, M12-connector 4-pin, IP67, nickel plated brass, laser diode, red light



Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

Electrical features

Type of electrical connection	Connector M12
Setting procedure	other
Laser power	1 mW
No-load current	50 mA
Number of pins	4
Switching distance	0 - 2500 mm
Switching frequency	5000 Hz
Absolute repeat accuracy	0.008 mm
Operating voltage (DC)	12 - 32 V
ardSOCA_ElektrischerAnschluss	M12 4-pin plug connector
ardSOCA_Betriebsspannung	12-32VDC

Mechanical features

Design	Cylinder, screw-thread
Thread length	60 mm
Thread pitch	1 mm
Storage temperature	-20 - 85 °C
Length	90 mm
Surface	nickel-plated
Degree of protection (IP)	IP67
Housing material	Brass
Thread dimension	M18
Ambient temperature	-20 - 50 °C
ardSOCA_Abmessungen	M18x1, 90mm long

Optical features

Aperture width	0.8 mm
Aperture length	6.5 mm
Filter	Interference filter
Laser class	Class 1
Light source	Laser diode, red light
Light beam form	Line
Wavelength of the sensor	670 nm


Classification

ETIM 8	EC002716 Through-beam photoelectric sensor
--------	--

More

IPF Product Group	705 special devices (SI)
packaging dimensions	123 x 77 x 25 mm
gross weight	100 g
Customs tariff number	85365019
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

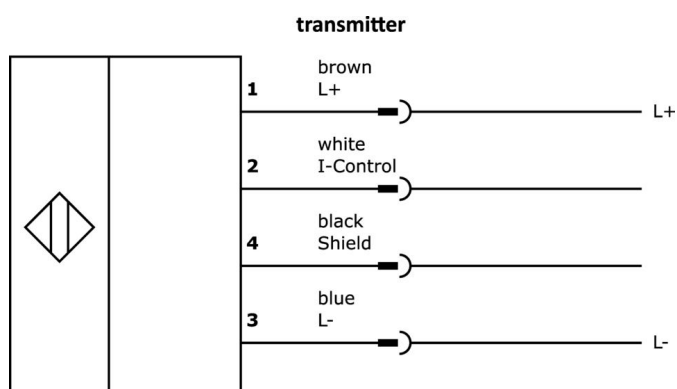

Extract accessories program**AY000162**

Accessories, magnetic, Ø43mm,
neodymium-iron-boron, inside
thread M5, rubber

AY000159

accessories sensor, Mounting
pipe, Ø12mm 200long, Aluminum
Anodised

AY98A607

accessories sensor, Teflon cap,
Ø16mm 16long, inner thread 12,
Polytetrafluorethylene (PTFE)

AY000117

accessories sensor, Fixture kit,
Metal, ball joint

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried
out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.