

PT499370

Laser sensors • Diffuse reflection sensors with background suppression

Sensor laser, diffuse reflection sensor, 49x40x14mm, Sn: 50-550, 12-28V DC, 1x PNP NC/NO, M8 plug connector 4-pin, IP67, aluminum+glass, laser diode, red light, dot, teach-in

- / Laser class 2
- / Metal housing
- / small light spot



background suppression Setting via teach-in

Optical sensors work contactless. They detect objects, regardless of their properties (e.g. shape, color, surface structure, material). The basic mode of operation is based on the transmitter and receiver of light. There are three different versions: 1. the through-beam sensor consists of two separate devices, a transmitter and a receiver, which are aligned with each other. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. in the reflex light barrier, the transmitter and receiver are located in one device. The transmitted light beam is reflected onto the receiver by a reflector to be mounted opposite. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. the diffuse reflection sensor has a transmitter and receiver in one device. The transmitted light beam is reflected by the object to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

Electrical features

Number of switching outputs	1
Display	LED display
Type of switching function	Normally closed contact/normally open contact
Type of electrical connection	Connector M8
Type of switching output	PNP
Rated switching current	100 mA
Setting procedure	Teach-In
Laser power	1 mW
No-load current	50 mA
Number of pins	4
Switching distance	50 - 550 mm
Voltage drop	2.8 V
Scanning function	Light-/dark-on mode
Reverse polarity protection	Yes
Measurement principle	triangulation
Operating voltage (DC)	12 - 28 V

Mechanical features

Design	Cuboid
Width	13.6 mm
Height	49 mm
Storage temperature	-20 - 60 °C
Length	40.3 mm
Degree of protection (IP)	IP67
Active area material of sensor	glass
Housing material	Zinc die-cast
Ambient temperature	-10 - 50 °C

Optical features

Laser class	Class 2
Light source	Laser diode, red light
Light beam form	Point
Triangulation	Background suppression
Wavelength of the sensor	660 nm
Light spot diameter at focal point	0.5 mm

Other features

Operational mode	Background suppression
Reference medium / object	Material with 90% reflectivity


Classification

ETIM 8	EC002719 Photoelectric proximity switch with background suppression
--------	---------------------------------------------------------------------


More

IPF Product Group	160 laser sensor
packaging dimensions	160 x 99 x 60 mm
gross weight	101 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

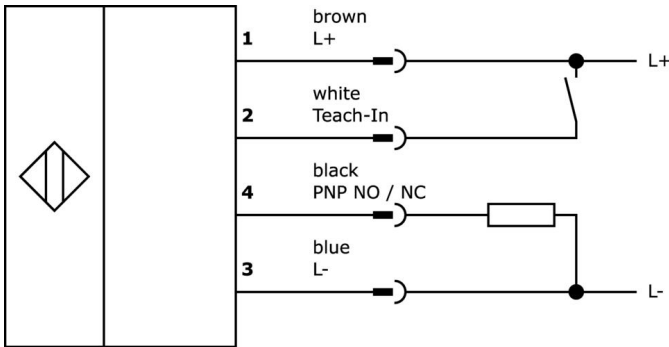

Dimensional drawing

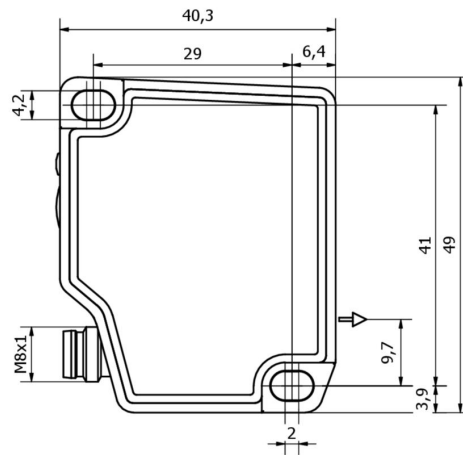

Extract accessories program

VK030F71



Connection cable, 0.3m, M8 socket 4-pin angular, M8 connector 4-pin straight, 4-core, PUR (polyurethane), suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VK030F75



Connection cable, 0.3m, M8 socket 4-pin straight, M8 connector 4-pin straight, 4-core, PUR (polyurethane), suitable for trailing chain and torsion-resistant, oils and cooling lubricants, welding area, silicone-free

AY000096



Accessories Sensor, mounting kit, metal, ball joint

VK030F81



Connection cable, 0.3m, M8 socket 4-pin angular, M12 connector 4-pin straight, 4x0.34mm², PUR (polyurethane), 60V, IP67, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VK030F85



Connection cable, 0.3m, M8 socket 4-pin straight, M12 connector 4-pin straight, 4x0.34mm², PUR (polyurethane), 60V, IP67, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VK200371



Connection cable, 2m, M8 Female (socket) 4pin Angular, Free conductor end, 4x0.34mm², PUR (Polyurethane), Ø4.7mm, 30V, -30-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free

VK200375



Connection cable, 2m, M8 Female (socket) 4pin Straight, Free conductor end, 4x0.34mm², PUR (Polyurethane), Ø4.7mm, 30V, -30-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free

VK030F73



Connection cable, 0.3m, M8 socket 4-pin angular, M8 connector 4-pin straight, 4x0.34mm², PUR (polyurethane) black, 24V, -30-90°C, IP67, TPU, 3A, LED, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding range, silicone-free

VK060F73



Connection cable, 0.6m, M8 socket 4-pin angular, M8 connector 4-pin straight, 4x0.34mm², PUR (polyurethane) black, 24V, -30-90°C, IP67, TPU, 3A, LED, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding range, silicone-free

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3 ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.