

UT189523

Ultrasonic sensors • Pushbuttons

sensor ultrasonic, diffuse-reflection sensor, M18x1 56long, Sn: 150-1500, 18-30V DC, 1x PNP/NPN Programmable/configurable, IO-Link, Connector M12 4pin, IP67, Brass Nickel-plated, Teach-In, With LED display, ultrasonic cone Axial

including Nut



Ultrasonic sensors are non-contact and wear-free position switches which can also be used under rough environmental conditions. A key advantage of these devices lies in the fact that the material and the surface characteristics of the objects to be detected can be almost anything. Solids, liquids, grainy materials and powdery materials can be identified without the shape or the color of the object having any influence to the measured result. In addition, the ability to detect transparent materials such as films and fluids is of particular importance. The shape and color of the objects do not influence the result of the detection. The capability to detect transparent films or liquids is also of special importance. Ultrasonic sensors are used for distance measurement (e.g. detection of diameters, loop control), for fill level detection (e.g. silo detection), for positioning and presence detection (e.g. glass pane positioning, film tear check, glass bottle detection)

Electrical features

Response/decay time	10 ms
Number of switching outputs	1
Display	LED display
Resolution	1 mm
Type of switching function	Programmable/configurable
Type of electrical connection	Connector M12
Type of switching output	PNP/NPN
Rated switching current	150 mA
Readiness delay	300 ms
Setting procedure	Teach-In
Short-circuit protection	Yes
No-load current	40 mA
Number of pins	4
Sound outlet	axial
Switching frequency	5 Hz
Protection class	III
Voltage drop	2 V
Temperature drift over entire measuring range	1 %
Carrier frequency	400 kHz
Reverse polarity protection	Yes
Absolute repeat accuracy	1 mm
Supported communication interface	IO-Link
Operating voltage (DC)	18 - 30 V
Measuring range	150 - 1500 mm

Mechanical features

Design	Cylinder, screw-thread
Thread length	30.5 mm
Thread pitch	1 mm
Length	55.5 mm
Mounting distance	700 mm
Surface	nickel-plated
Degree of protection (IP)	IP67
Housing material	Brass
Diameter detection	Yes
Thread dimension	M18
Ambient temperature	-25 - 70 °C

Other features

Operating frequency	400 kHz
Object detection on conveyor systems	Yes
Reference medium / object	Measuring plate 200x200mm
ardTE00_Anwendungen	Niveauabfrage


Classification

ETIM 8	EC001849 Ultrasonic probe
--------	---------------------------


More

IPF Product Group	250 ultrasonic sensors
packaging dimensions	175 x 155 x 20 mm
gross weight	56 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

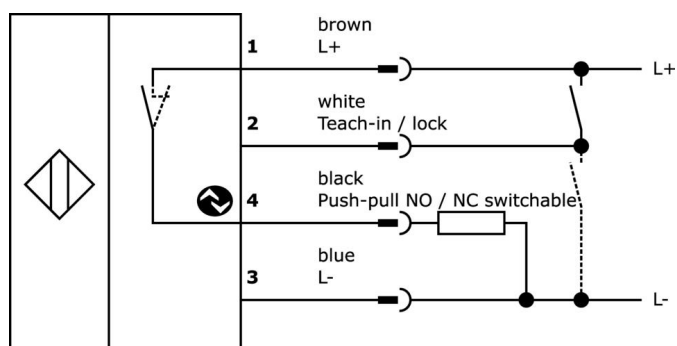

Dimensional drawing

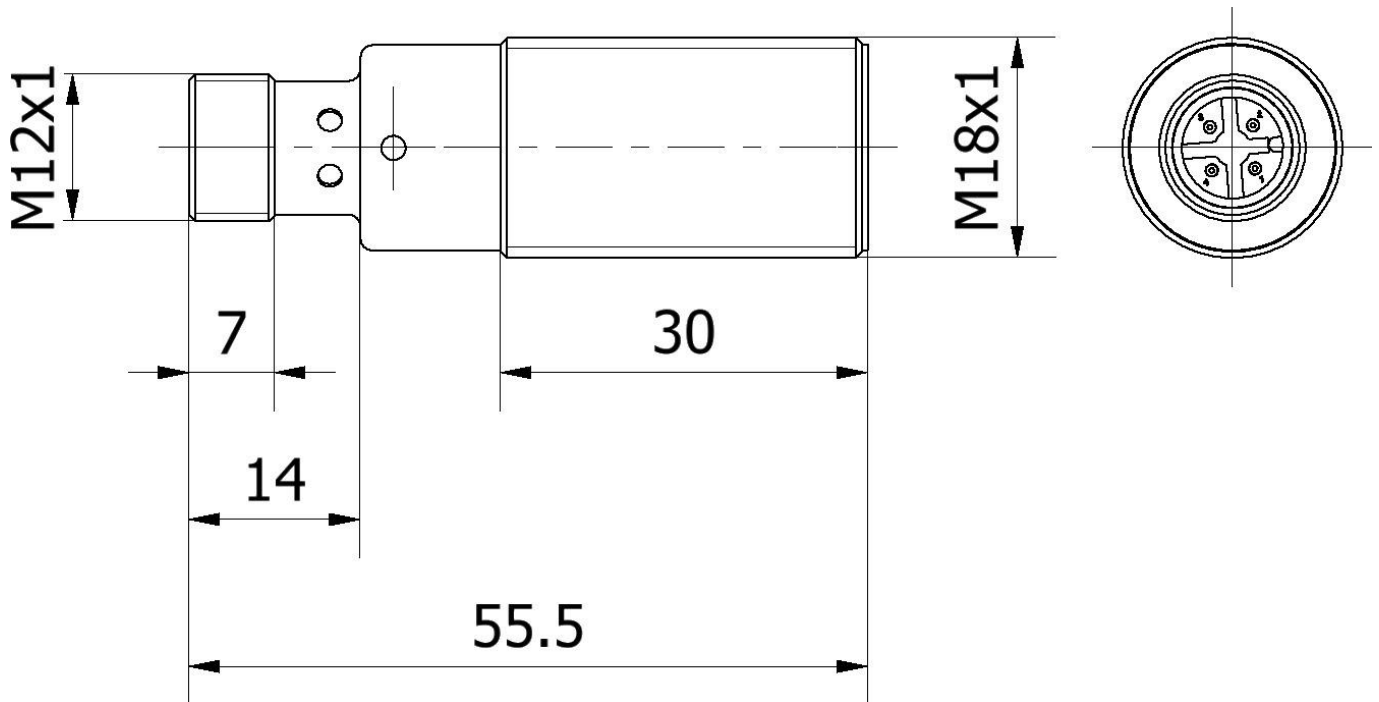

Extract accessories program

VK200321



Connection cable, 2m, M12
Female (socket) 4pin Angular, Free
conductor end, 4x0.34mm², PUR
(Polyurethane), Ø4.7mm, 250V, -
40-90°C, IP67, Suitable for trailing
chain and torsion resistant, Oil and
cooling lubricants, Welding area,
Silicone-free

VK200325



Connection cable, 2m, M12
Female (socket) 4pin Straight, Free
conductor end, 4x0.34mm², PUR
(Polyurethane), Ø4.7mm, 250V, -
40-90°C, IP67, Suitable for trailing
chain and torsion resistant, Oil and
cooling lubricants, Welding area,
Silicone-free

VK030F21



Connection cable, 0.3m, M12
socket 4-pin angular, M12
connector 4-pin straight, 4x0.
34mm², 240V, IP67, suitable for
trailing chain and torsion resistant,
oils and cooling lubricants,
welding area, silicone-free

VK030F25



Connection cable, 0.3m, M12
socket 4-pin straight, M12
connector 4-pin straight, 4x0.
34mm², PUR (polyurethane),
240V, IP67, suitable for trailing
chain and torsion resistant, oils
and cooling lubricants, welding
area, silicone-free

AY000162



Accessories, magnetic, Ø43mm,
neodymium-iron-boron, inside
thread M5, rubber

AY000159



accessories sensor, Mounting
pipe, Ø12mm 200long, Aluminum
Anodised

AY000117



accessories sensor, Fixture kit,
Metal, ball joint

AY000014



accessories sensor, Reduction
sleeve, M18, Plastic

AY000026



accessories, Hexagon nut, M18x1,
Wrench size 24mm, Brass Nickel-
plated

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.
- / Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com