

VK001016

Connection technology • Distribution terminals

distributor, 30x152x60mm, 10-30V DC, 8x M12 5pin, Fixed-cable distributor / connected trunk line, IP67, TPU, With LED display, Sensor/actuator slot with equipment grounding conductor, 12A

including Identification label, Screw plug



The wiring of sensors and actors is considerably more comfortable with our sensor distribution box. The individual devices are connected with the distributor via an M8 or M12 cable that is pre-assembled on both sides. By means of the trunk line the effort for laying and wiring the cables can be reduced significantly. The operating mode display provides information about the sensors operating mode (operating voltage, switching state). Thus, troubleshooting is simpler, as an overview about the functioning of the connected periphery is directly given.

Electrical features

Display	LED display
Type of A electrical connection	M12
Type of B electrical connection	Free conductor end
Max. ampacity per socket	4 A
Max. total current	12 A
Number of pins of A connection	5
Number of slots	8
Operating voltage (DC)	10 - 30 V
Sensor/actuator slot with equipment grounding conductor	Yes

Mechanical features

Width	60 mm
Height	30.3 mm
Cable length	5 m
Length	152 mm
Degree of protection (IP)	IP67
Housing material	TPU
Structure of trunk line	16 x 0.5mm ² + 3x 1mm ²
Type of cable gland	none
Ambient temperature	-15 - 80 °C
Line diameter	8 mm


Classification

ETIM 8	EC002585 Passive sensor/actuator distributor (with cable)
--------	---

More

IPF Product Group	855 cable sockets / connectors (distributor, accessories, diverse)
packaging dimensions	350 x 250 x 45 mm
gross weight	1220 g
Customs tariff number	85366990
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

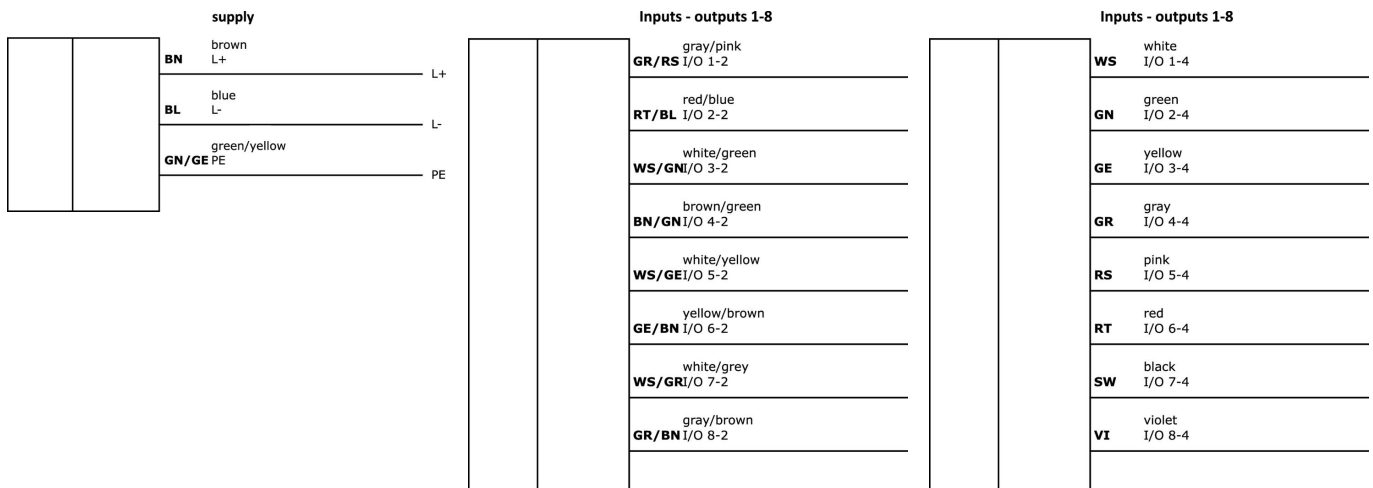

Extract accessories program

AY000141



Plastic sheath, Ø17mm, Inner diameter 10mm, -40-250°C, Glass fiber with silicone rubber, Short-term resistance to weld spatter 1200°C, Tensile strength 400N, Flexible, Flame retardant, yard good

AV000135



Labeling material, Label, 2, 6x20x9mm, Plastic,

VK003027



Cable connector, Angular, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 60V, -25-90°C, M12 Male (connector) 5pin, IP67, PBT

VK003029



Cable connector, Straight, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 60V, -25-90°C, M12 Male (connector) 5pin, IP67, PBT

VK000004



Screw plug, M12x1.5, plastic, black

VK200621



Connection cable, 2m, M12 Female (socket) 5pin Angular, Free conductor end, 5x0.34mm², PUR (Polyurethane), Ø5.4mm, 60V, -25-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free

VK200625



Connection cable, 2m, M12 Female (socket) 5pin Straight, Free conductor end, 5x0.34mm², PUR (Polyurethane), Ø5.4mm, 60V, -25-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3 ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.