

VK00302H

Connection technology • Cable sockets / connectors for self-assembly

Cable connector, straight, self-assembly, screw connection, Ø4-8mm, 2A, 30V, -30-80°C, M12 connector 8pin, IP67



ipf cable boxes are mainly used to establish the electrical connection of sensors. Their characteristics are defined by the robust version, in highest protection classes (IP67 | IP68 | IP69K) and on request with 360° shielding. With the features: bus-compatible, drag chain and robot-compatible, oil-, chemical-resistant, welding spark-resistant, their detergent-resistant or resistance to high-pressure and steam jet cleaning, the extended temperature range up to +230°C, the rapid interconnection (technology) or special data transmission properties, the cable boxes meet all requirements of automation technology.

Electrical features

Type of plug-in contact, A connection	Male (connector)
Type of A electrical connection	M12
Type of B electrical connection	Screw connection
Number of pins of A connection	8
Ampacity	2 A
Operating voltage (AC 50Hz)	30 V
Operating voltage (DC)	30 V

Mechanical features

Wire cross section	0,5 mm ²
Cable infeed	straight
Cable infeed of A connection	straight
Coding of connection A	A
Degree of protection (IP)	IP67
Housing material	Plastic
Contact body material	Brass
Permitted cable diameter	4 - 8 mm
Material of the screw fitting	Brass
Ambient temperature	-30 - 80 °C


Classification

ETIM 8	EC001855 Assembled sensor-actuator cable
--------	--


More

IPF Product Group	852 cable sockets / connectors (self-assembly)
packaging dimensions	120 x 100 x 20 mm
gross weight	23 g
Customs tariff number	85369010
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

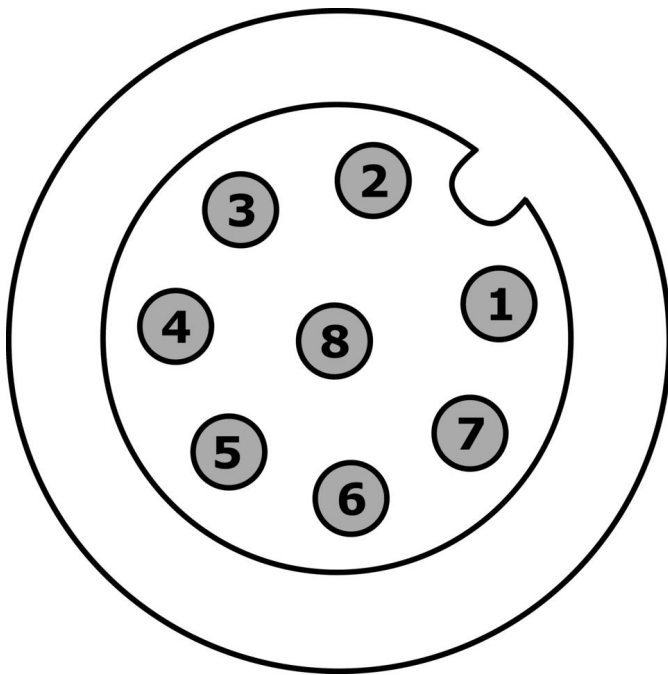

Dimensional drawing

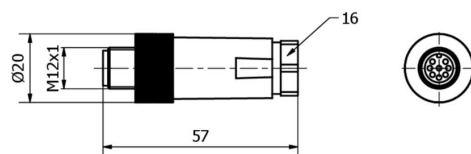

Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3 ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.