

VK03A247

Connection technology • Cable sockets / connectors pre-assembled on two sides

Connection cable, 0.3m, M8 socket 4-pin straight, M8 connector 3-pin straight, 3-core, PUR (polyurethane), suitable for trailing chain and torsion-resistant, oils and cooling lubricants, welding area, silicone-free



This connection cable has pre-wired connections on both sides. It can be used to cost-effectively integrate end devices with a plug connection via a distribution terminal or a logic module.

One side of the VK03A247 is equipped with a straight 4-pin M8 cable socket and the other with a straight 3-pin M8 cable connector. The cores of the line with a plastic sheath (PUR) can each be loaded with 4A.

Electrical features

Type of plug-in contact, A connection	Female (socket)
Type of plug-in contact, B connection	Male (connector)
Type of A electrical connection	M8
Type of B electrical connection	M8
Number of pins of A connection	4
Number of pins of B connection	3
Ampacity	4 A
Operating voltage (AC 50Hz)	60 V
Operating voltage (DC)	60 V

Mechanical features

Number of cores	3
Wire assembly	42 x 0.1mm
Cable sheath color	black
Cable length	0.3 m
Cable infeed of A connection	straight
Cable infeed of B connection	straight
Maximum tightening torque of connection A	0.6 Nm
Maximum tightening torque of connection B	0.6 Nm
bending cycles	5 million cycles
Torsion cycles	+/-360°/m, ≥ 2 million cycles
Contact coating material	Gold
Material of cable sheath	Plastic (PUR)
Contact body material	CuSn
Suitable for trailing chain	Yes

Other features

Flame retardant	in accordance with EN 60332-2-2
Halogen-free	Yes
Hydrolysis-proof	Yes
Free of LABS	Yes
Ozone and UV-resistant	Yes
Suitable for trailing chain and torsion resistant	Yes
Welding area	Yes
Silicone-free	Yes
Oil and cooling lubricants	Yes


Classification

ETIM 8	EC001855 Assembled sensor-actuator cable
--------	--

More

IPF Product Group	851 cable sockets / connectors (both side ready made)
packaging dimensions	240 x 150 x 50 mm
gross weight	20 g
Customs tariff number	85444290
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

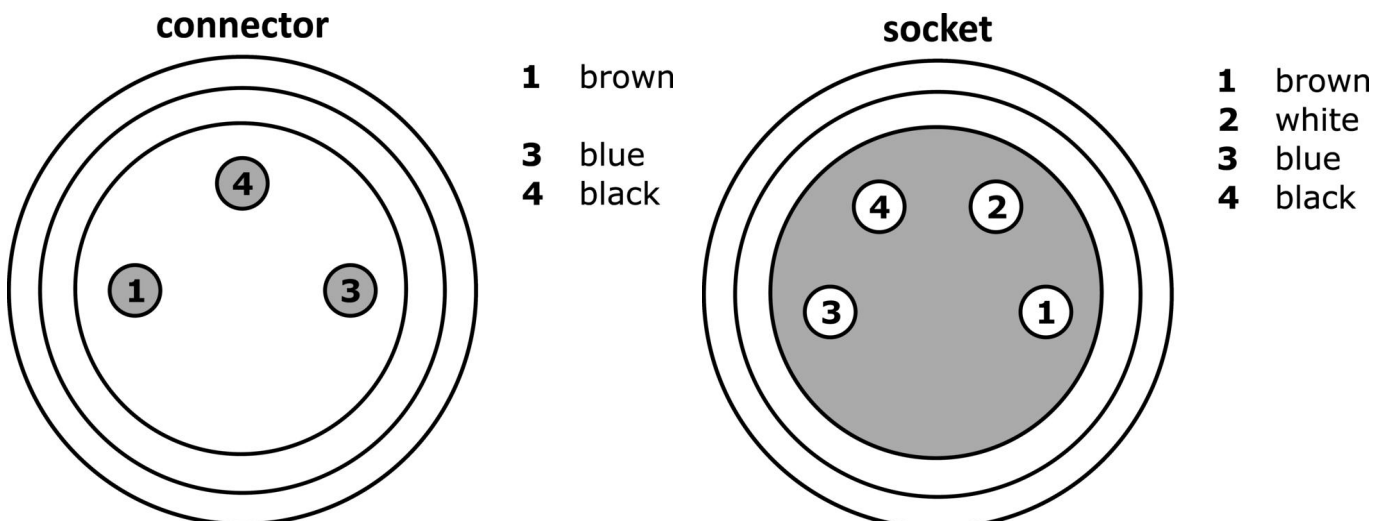

Extract accessories program

AV000142



accessories cable socket,
Mounting clip, 8.5mm, PPO,
Packaging unit 5, Accessories for
Cable socket/connector M8

AV98F001



AV98F002



Tool, wrench insert for torque
wrench, SW13

AV000117



Labeling material, Label, 2,
1x30x4mm, Plastic PC, 34
identification labels

AY000141



Plastic sheath, Ø17mm, Inner
diameter 10mm, -40-250°C, Glass
fiber with silicone rubber, Short-
term resistance to weld spatter
1200°C, Tensile strength 400N,
Flexible, Flame retardant, yard
good

AV000140



You can find further accessories on our homepage



Installation

Mounting / installation may only be carried
out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.