

## VK207F44

### Connection technology • Programming cable

Connection cable RS232/Sub-D, 2m, M5 Male (connector) Straight, D-Sub Male (connector) 9pin Straight, PUR (Polyurethane)



This shielded cable tail can be used to digitally transmit complex information to a network for further processing. The connections are pre-wired.

The VK207F44 is equipped with an M9 connector on the device side and a 9-pin D-Sub connector on the network side.

#### Electrical features

Type of plug-in contact, A connection	Male (connector)
Type of plug-in contact, B connection	Male (connector)
Type of A electrical connection	M5
Type of B electrical connection	D-Sub
Number of pins of A connection	4
Number of pins of B connection	9
Supported communication interface	RS232
Shielded	Yes

#### Mechanical features

Number of cores	4
Cable sheath color	black
Cable length	2 m
Cable infeed of A connection	straight
Cable infeed of B connection	straight
Material of cable sheath	Plastic (PUR)

#### Other features

Version	Programming cable
---------	-------------------

#### Classification


ETIM 8	EC001855 Assembled sensor-actuator cable
--------	--

**More**


IPF Product Group	856 cable socket / cable connector (diverse)
packaging dimensions	175 x 100 x 15 mm
gross weight	86 g
Customs tariff number	85444290
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection**

**connector**

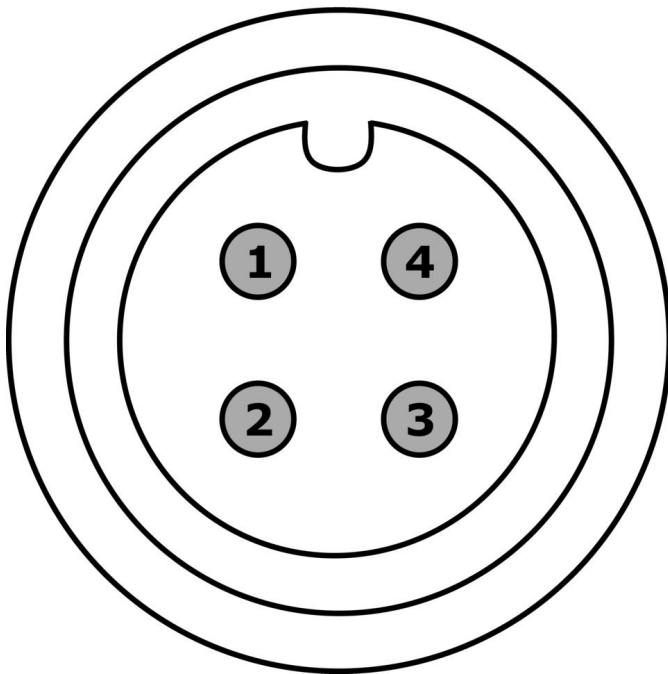

**socket**

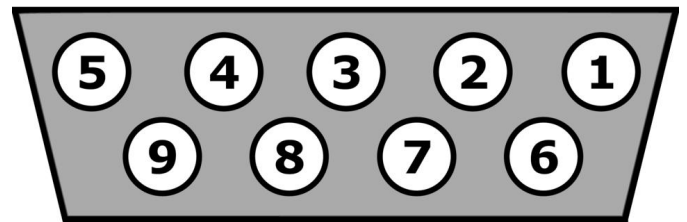

**Extract accessories program****AV000117**

Labeling material, Label, 2,  
1x30x4mm, Plastic PC, 34  
identification labels

**AY000141**

Plastic sheath, Ø17mm, Inner  
diameter 10mm, -40-250°C, Glass  
fiber with silicone rubber, Short-  
term resistance to weld spatter  
1200°C, Tensile strength 400N,  
Flexible, Flame retardant, yard  
good

**AV98F001****AV98F002**

Tool, wrench insert for torque  
wrench, SW13

**AV000140**

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried  
out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3  
ElektroG: 40951076

**Safety warnings**

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.