

VK505F45

Connection technology • Programming cable

Programming cable, 5m, USB-3.0-Micro-B connector 10-pin straight, USB-A connector 10-pin straight, PVC



This shielded cable can be used to transmit complex information digitally into a network for further processing. The connections are pre-wired. The VK505F45 is equipped with a USB 3.0 micro B connector on the device side and a USB A connector on the network side.

Electrical features

Type of plug-in contact, A connection	Male (connector)
Type of plug-in contact, B connection	Male (connector)
Type of A electrical connection	USB 3.0 Micro-B
Type of B electrical connection	USB-A
Number of pins of A connection	10
Number of pins of B connection	10
Shielded	Yes

Mechanical features

Cable length	5 m
Cable infeed of A connection	straight
Cable infeed of B connection	straight
Material of cable sheath	Plastic (PVC)
Ambient temperature	-10 - 80 °C

Other features

Version	Programming cable
---------	-------------------

Classification

ETIM 8	EC003249 Data and communication cable
--------	---------------------------------------


More

IPF Product Group	851 cable sockets / connectors (both side ready made)
packaging dimensions	300 x 200 x 25 mm
gross weight	277 g
Customs tariff number	85444290
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

connector

connector

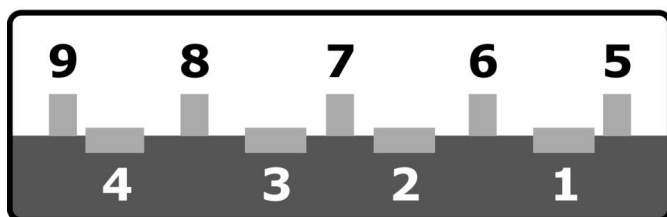

Extract accessories program

AY000141



Plastic sheath, Ø17mm, Inner diameter 10mm, -40-250°C, Glass fiber with silicone rubber, Short-term resistance to weld spatter 1200°C, Tensile strength 400N, Flexible, Flame retardant, yard good

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3 ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.