

VK507F46

Connection technology • Cable sockets / connectors pre-assembled on two sides

Connection cable, 5m, M9 connector 4-pin straight, M9 connector 4-pin straight, 4-core, PUR (polyurethane)



This connection cable has pre-wired connections on both sides. It can be used to cost-effectively integrate end devices with a plug connection via a distribution terminal or a logic module.

Electrical features

| | |
|---------------------------------------|------------------|
| Type of plug-in contact, A connection | Male (connector) |
| Type of plug-in contact, B connection | Male (connector) |
| Type of A electrical connection | M9 |
| Type of B electrical connection | M9 |
| Number of pins of A connection | 4 |
| Number of pins of B connection | 4 |

Mechanical features

| | |
|------------------------------|---------------|
| Number of cores | 4 |
| Cable length | 5 m |
| Cable infeed of A connection | straight |
| Cable infeed of B connection | straight |
| Material of cable sheath | Plastic (PUR) |
| Suitable for trailing chain | Yes |

Classification


| | |
|--------|------------------------------------------|
| ETIM 8 | EC001855 Assembled sensor-actuator cable |
|--------|------------------------------------------|

More


| | |
|-----------------------|----------------------------------------------|
| IPF Product Group | 856 cable socket / cable connector (diverse) |
| packaging dimensions | 170 x 120 x 25 mm |
| gross weight | 152 g |
| Customs tariff number | 85444290 |
| WEEE number | 40951076 |
| POP-compliant | Yes |
| Reach-compliant | Yes |
| RoHS-compliant | Yes |

Connection

connector

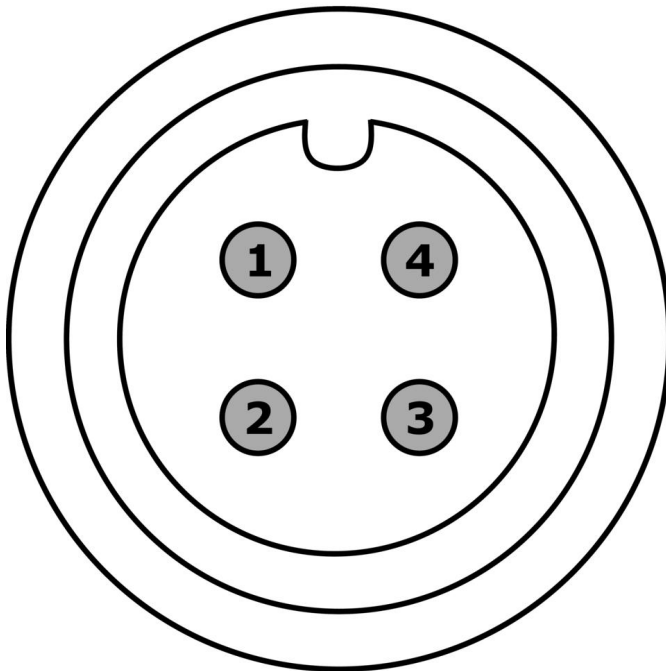

connector

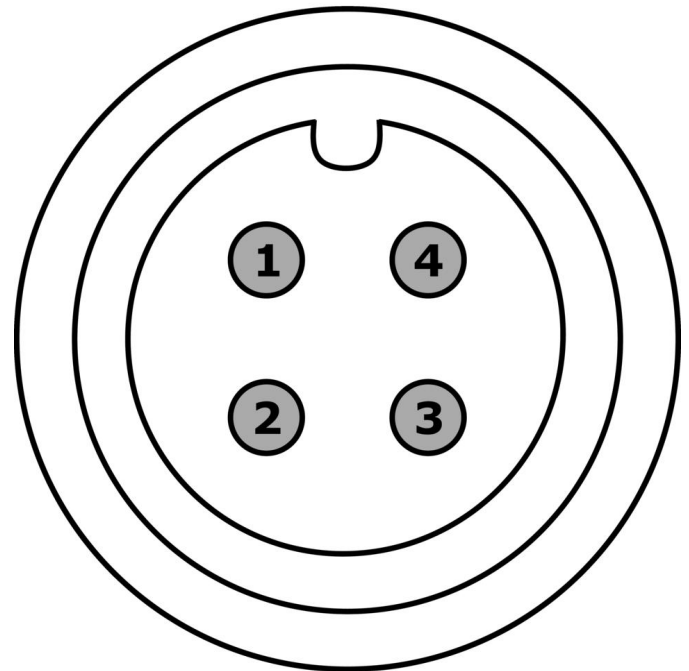

Extract accessories program

AV000141



accessories cable socket,
Mounting clip, 13.5mm, PPO,
Packaging unit 5, Accessories for
Cable socket/connector M12

AV98F001



AV98F002



Tool, wrench insert for torque
wrench, SW13

AY000141



Plastic sheath, Ø17mm, Inner
diameter 10mm, -40-250°C, Glass
fiber with silicone rubber, Short-
term resistance to weld spatter
1200°C, Tensile strength 400N,
Flexible, Flame retardant, yard
good

AV000140



You can find further accessories on our homepage



Installation

Mounting / installation may only be carried
out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.