

## VK50L321

### Connection technology • Cable sockets / connectors pre-assembled on one side

Connection cable, 5m, M12 Female (socket) 4pin Angular, Free conductor end, 4x0.34mm<sup>2</sup>, TPE Gray, 250V, -40-105°C, IP67, 4A, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants



ipf cable sockets are used primarily for establishing the electrical connection of sensors. Their features are characterized by rugged design, the highest protection classes (IP67 | IP68 | IP69K) and, if desired, with 360° shielding. With the features: bus-ready, suitable for use with drag chains and robots, resistance to oil and chemicals, resistance to welding sparks, their resistance to cleaning agents or high-pressure and steam-jet cleaning, the expanded temperature range of up to +230°C, the rapid interconnection technology and special data transmission properties, the cable sockets meet all requirements in automation technology.

#### Electrical features

Type of plug-in contact, A connection	Female (socket)
Type of cable	Multi-core
Type of A electrical connection	M12
Type of B electrical connection	Free conductor end
Flow resistance	5 mOhm
Number of pins of A connection	4
Ampacity	4 A
Operating voltage (AC 50Hz)	250 V
Operating voltage (DC)	250 V

**Mechanical features**

Number of cores	4
Wire assembly	42 x 0.1mm
Wire cross section	0,34 mm <sup>2</sup>
Conductor cross-section	0.34 mm <sup>2</sup>
Cable sheath color	Gray
Cable length	5 m
Cable infeed of A connection	angular
Maximum tightening torque of connection A	1 Nm
Degree of protection (IP)	IP67
Contact coating material	Gold
Material of cable sheath	Plastic (TPE)
Contact body material	Brass
Perm. ambient temperature of cable, fixed cable	-40 - 105 °C
Perm. ambient temperature of cable, flexible cable	-25 - 105 °C
Suitable for trailing chain	Yes
Seawater-resistant	Yes
Material of the screw fitting	Stainless steel (V4A)
Ambient temperature	-40 - 105 °C
Line diameter	4.6 mm

**Optical features**

Degree of soiling	3
-------------------	---

**Other features**

Flame retardant	Yes
Halogen-free	Yes
Hydrolysis-proof	Yes
Free of LABS	Yes
Ozone and UV-resistant	Yes
Suitable for trailing chain and torsion resistant	Yes
Acid and alkali-resistant	Yes
Oil and cooling lubricants	Yes


**Classification**

ETIM 8	EC001855 Assembled sensor-actuator cable
--------	--

**More**


IPF Product Group	856 cable socket / cable connector (diverse)
packaging dimensions	50 x 165 x 15 mm
gross weight	146 g
Customs tariff number	85444290
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection**

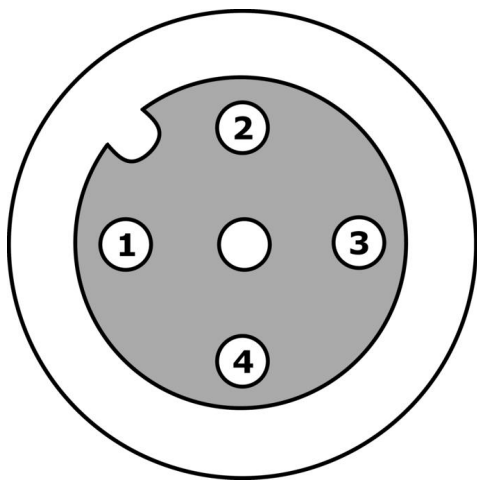

- 1** brown
- 2** white
- 3** blue
- 4** black

**Dimensional drawing**

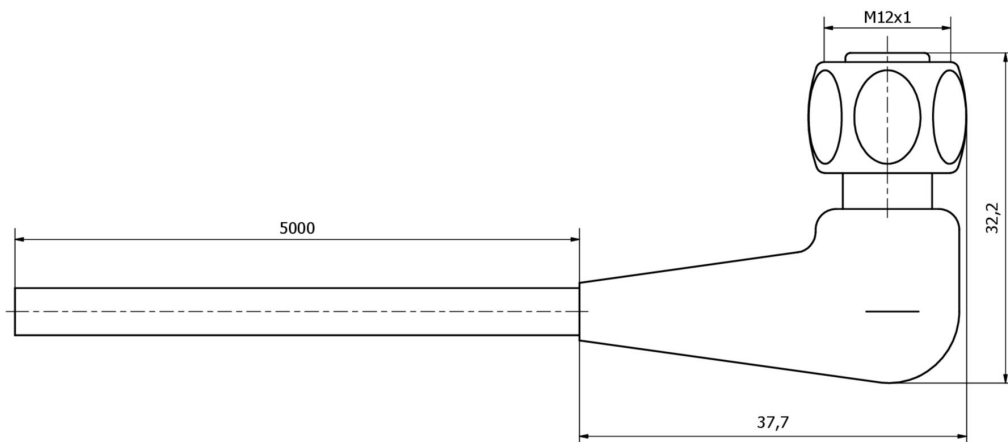

**Extract accessories program****AY000141**

Plastic sheath, Ø17mm, Inner diameter 10mm, -40-250°C, Glass fiber with silicone rubber, Short-term resistance to weld spatter 1200°C, Tensile strength 400N, Flexible, Flame retardant, yard good

**AV98F001****AV98F002**

Tool, wrench insert for torque wrench, SW13

**AV000116**

Labeling material, Label sleeve, 30mm long, Cable diameter 3.7-6.2mm, Plastic, Transparent

**AV000130**

Tool, Wire stripper, 28x166x102mm, Skinning range diameter 4.4-7mm, Plastic

**AV000132**

Tool, Wire stripper, 28x166x102mm, Skinning range diameter 3.2-4.4mm, Plastic

**AV000140**

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3 ElektroG: 40951076

**Safety warnings**

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.