

VK50L471

Connection technology • Cable sockets / connectors pre-assembled on one side

Connection cable, 5m, M8 Female (socket) 4pin Angular, LED, Free conductor end, 4x0.34mm², TPE Gray, Ø4.6mm, 30V, -40-105°C, IP67, PP, 4A, Suitable for trailing chain and torsion resistant



ipf cable sockets are used primarily for establishing the electrical connection of sensors. Their features are characterized by rugged design, the highest protection classes (IP67 | IP68 | IP69K) and, if desired, with 360° shielding. With the features: bus-ready, suitable for use with drag chains and robots, resistance to oil and chemicals, resistance to welding sparks, their resistance to cleaning agents or high-pressure and steam-jet cleaning, the expanded temperature range of up to +230°C, the rapid interconnection technology and special data transmission properties, the cable sockets meet all requirements in automation technology.

Electrical features

Display	LED display
Type of plug-in contact, A connection	Female (socket)
Type of cable	Multi-core
Type of A electrical connection	M8
Type of B electrical connection	Free conductor end
Number of pins of A connection	4
Ampacity	4 A
Operating voltage (AC 50Hz)	30 V
Operating voltage (DC)	30 V

Mechanical features

Number of cores	4
Wire assembly	42 x 0.1mm
Wire cross section	0,34 mm ²
Conductor cross-section	0.34 mm ²
Cable sheath color	Gray
Cable length	5 m
Cable infeed of A connection	angular
Maximum tightening torque of connection A	0.6 Nm
Degree of protection (IP)	IP68
Contact coating material	Gold
Housing material	PP
Material of cable sheath	Kunststoff (TPE)
Contact body material	Brass
Perm. ambient temperature of cable, fixed cable	-40 - 105 °C
Perm. ambient temperature of cable, flexible cable	-25 - 105 °C
Material of the screw fitting	Stainless steel (V4A)
Ambient temperature	-40 - 105 °C
Line diameter	4.6 mm
ardTEME_Werkstoffeigenschaften	Halogenfrei Hydrolysefest LABS-frei Ozonbeständig UV-Beständig
ardTEME_Umgebungsbestaendigkeiten	Säurebeständig Laugenbeständig Seewasserbeständig

Optical features

Degree of soiling	3
-------------------	---

Other features


Ozone-resistant	Yes
ardTE00_Anwendungen	Schleppkettentauglich

Classification

ETIM 8	
--------	--

More


IPF Product Group	856 cable socket / cable connector (diverse)
packaging dimensions	270 x 190 x 120 mm
gross weight	133 g
Customs tariff number	85444290
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

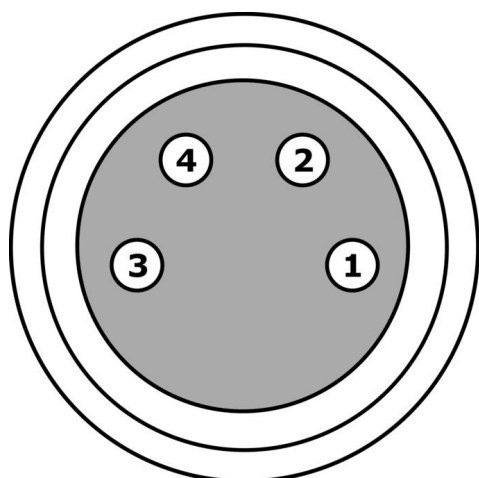Connection

- 1** brown
- 2** white
- 3** blue
- 4** black

LEDs: green (PIN1), yellow (PIN 4)

Dimensional drawing

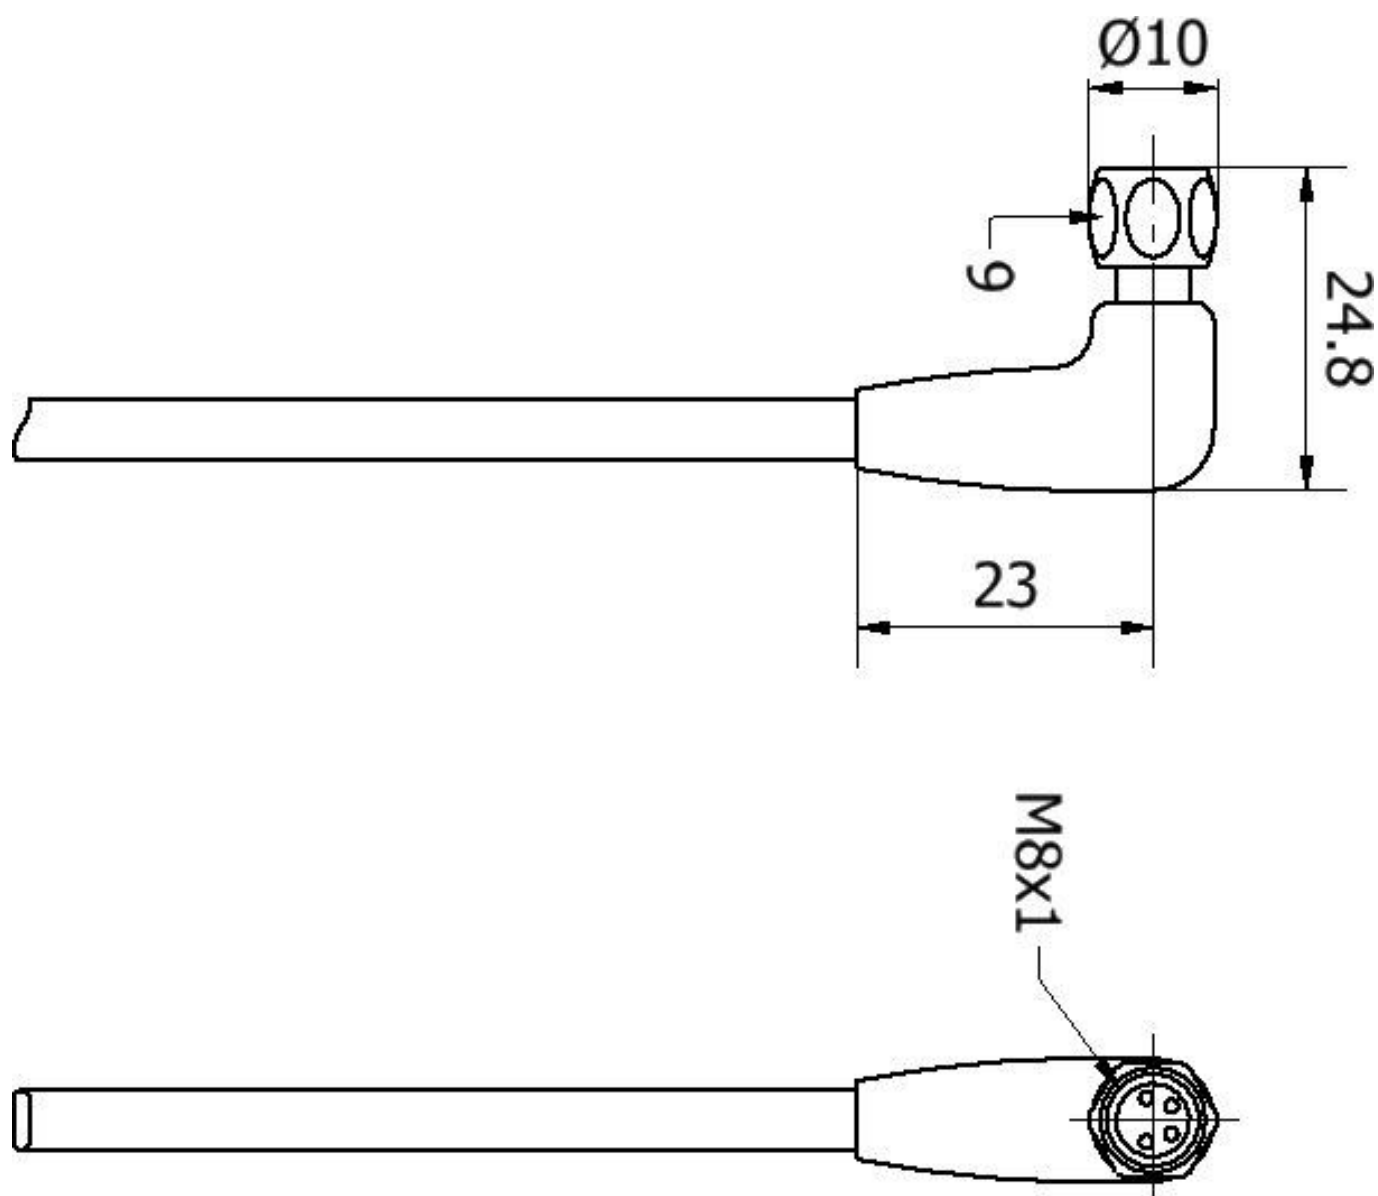

Extract accessories program

AV000130



Tool, Wire stripper,
28x166x102mm, Stripping range
diameter 4.4-7mm, Plastic

AV000132



Tool, wire stripper,
28x166x102mm, stripping range
diameter 2.9-4.4mm, plastic

AY000141



Plastic sheath, Ø17mm, Inner
diameter 10mm, -40-250°C, Glass
fiber with silicone rubber, Short-
term resistance to weld spatter
1200°C, Tensile strength 400N,
Flexible, Flame retardant, yard
good

AV98F001



AV98F002



Tool, wrench insert for torque
wrench, SW13

AV000116



Labeling material, Label sleeve,
30mm long, Cable diameter 3.7-6.
2mm, Plastic, Transparent

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried
out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.