

VK50V321

Connection technology • Cable sockets / connectors pre-assembled on one side

Connection cable, 5m, M12 socket 4-pin angular, free cable end, 4x0.25mm², PUR/PVC, Ø4.2mm, 250V, -25-70°C, IP67



ipf cable sockets are mainly used for the electrical connection of sensors. Their properties are characterized by the robust version, in the highest degrees of protection (IP67 | IP68 | IP69K) and with 360° shielding on request. With the features: bus-compatible, drag chain and robot-compatible, oil and chemical-resistant, welding spark-resistant, cleaning agent-resistant or resistant to high-pressure and steam jet cleaning, the enlarged temperature range up to +230°C, rapid interconnection (technology) or special data transmission properties, the cable sockets meet all the requirements of automation technology.

Electrical features

Type of plug-in contact, A connection	Female (socket)
Type of A electrical connection	M12
Type of B electrical connection	Free conductor end
Number of pins of A connection	4
Ampacity	4 A
Operating voltage (DC)	250 V
ardSOCA_Betriebsspannung	250VDC

Mechanical features

Core insulation material	Plastic (PVC)
Number of cores	4
Wire assembly	32 x 0.1mm
Conductor cross-section	0.25 mm ²
Bending radius (flexible)	65 mm
Cable length	5 m
Cable infeed of A connection	angular
Maximum tightening torque of connection A	0.8 Nm
Degree of protection (IP)	IP67
Housing material	TPU
Material of cable sheath	Kunststoff (PUR)
Perm. ambient temperature of cable, fixed cable	-40 - 70 °C
Perm. ambient temperature of cable, flexible cable	-5 - 60 °C
Material of the screw fitting	Nickel-plated (n-pltd) brass
Contact material	CuSn, gold-plated
Ambient temperature	-25 - 70 °C
Line diameter	4.2 mm
ardTEME_Werkstoffeigenschaften	Silikonfrei
ardTEME_Umgebungsbestaendigkeiten	Öle Kühlschmiermittel

Other features

ardTE00_Anwendungen	Schleppkettentauglich
---------------------	-----------------------


Classification

ETIM 8

More


IPF Product Group	850 cable sockets / connectors (one side ready made)
packaging dimensions	150 x 150 x 25 mm
gross weight	131 g
Customs tariff number	85444290
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

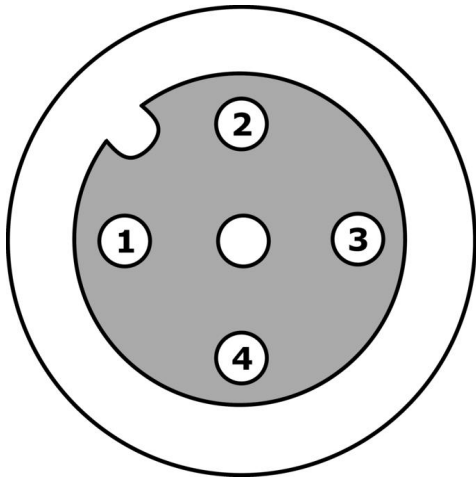

- 1** brown
- 2** white
- 3** blue
- 4** black

Dimensional drawing

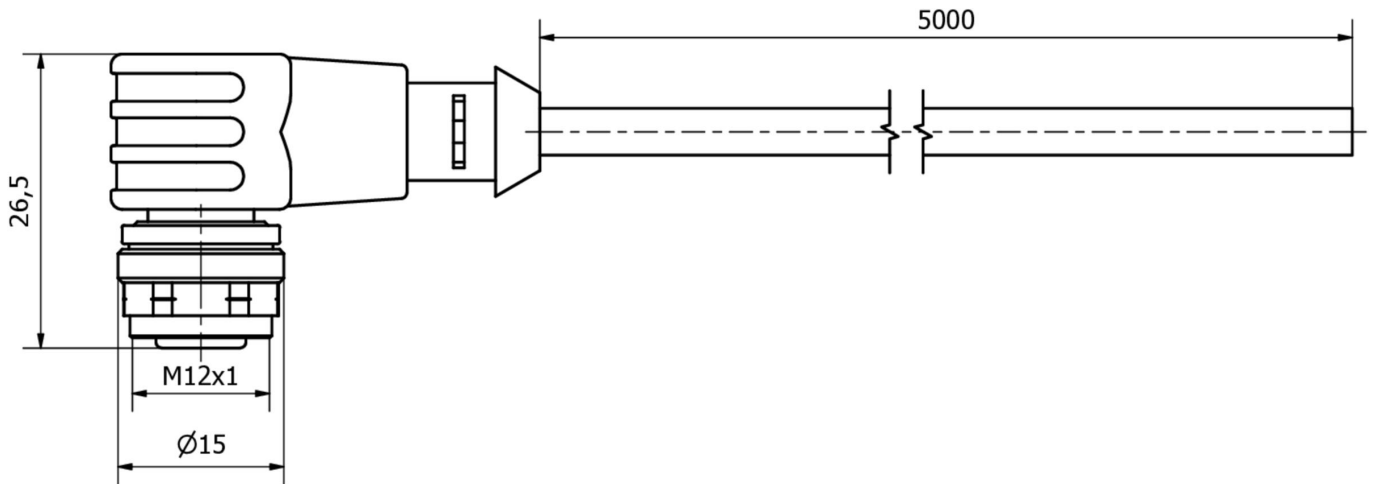

Extract accessories program

AV000116



Labeling material, Label sleeve,
30mm long, Cable diameter 3.7-6.
2mm, Plastic, Transparent

AY000141



Plastic sheath, Ø17mm, Inner
diameter 10mm, -40-250°C, Glass
fiber with silicone rubber, Short-
term resistance to weld spatter
1200°C, Tensile strength 400N,
Flexible, Flame retardant, yard
good

AV000130



Tool, Wire stripper,
28x166x102mm, Skinning range
diameter 4.4-7mm, Plastic

AV000132



Tool, Wire stripper,
28x166x102mm, Skinning range
diameter 3.2-4.4mm, Plastic

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.