

VKA0L075

Connection technology • Cable sockets / connectors pre-assembled on one side

Connection cable, 10m, M8 socket 3-pin straight, free cable end, 3x0.34mm², TPE gray, Ø4.6mm, 60V, -40-105°C, IP67, PP, 4A, suitable for trailing chain and torsion resistant



ipf cable sockets are mainly used for the electrical connection of sensors. Their properties are characterized by the robust version, in the highest degrees of protection (IP67 | IP68 | IP69K) and with 360° shielding on request. With the features: bus-compatible, drag chain and robot-compatible, oil and chemical-resistant, welding spark-resistant, cleaning agent-resistant or resistant to high-pressure and steam jet cleaning, the enlarged temperature range up to +230°C, rapid interconnection (technology) or special data transmission properties, the cable sockets meet all the requirements of automation technology.

Electrical features

Type of plug-in contact, A connection	Female (socket)
Type of cable	Multi-core
Type of A electrical connection	M8
Type of B electrical connection	Free conductor end
Flow resistance	5 mOhm
Number of pins of A connection	3
Ampacity	4 A
Operating voltage (AC 50Hz)	60 V
Operating voltage (DC)	60 V

Mechanical features

Number of cores	3
Wire assembly	42 x 0.1mm
Conductor cross-section	0.34 mm ²
Cable sheath color	Gray
Cable length	10 m
Cable infeed of A connection	straight
Maximum tightening torque of connection A	0.6 Nm
Degree of protection (IP)	IP67
Contact coating material	Gold
Housing material	PP
Material of cable sheath	Plastic (TPE)
Contact body material	Brass
Perm. ambient temperature of cable, fixed cable	-40 - 105 °C
Perm. ambient temperature of cable, flexible cable	-25 - 105 °C
Suitable for trailing chain	Yes
Seawater-resistant	Yes
Material of the screw fitting	Stainless steel (V4A)
Ambient temperature	-40 - 105 °C
Line diameter	4.6 mm

Optical features

Degree of soiling	3
-------------------	---

Other features

Flame retardant	No
Halogen-free	Yes
Hydrolysis-proof	Yes
Free of LABS	Yes
Ozone and UV-resistant	Yes
Suitable for trailing chain and torsion resistant	Yes
Acid and alkali-resistant	Yes


Classification

ETIM 8	EC001855 Assembled sensor-actuator cable
--------	--

More

IPF Product Group	856 cable socket / cable connector (diverse)
packaging dimensions	180 x 165 x 28 mm
gross weight	320 g
Customs tariff number	85444290
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

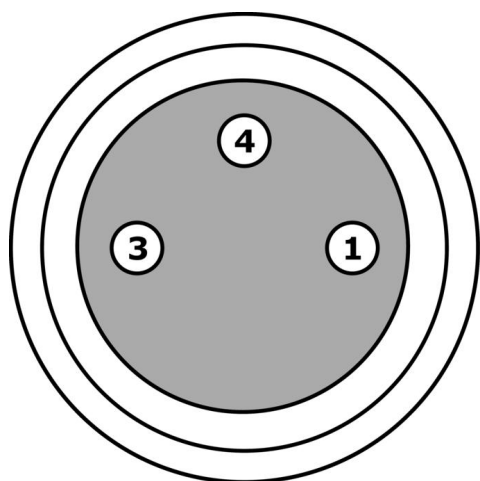


1 brown

3 blue

4 black

Dimensional drawing

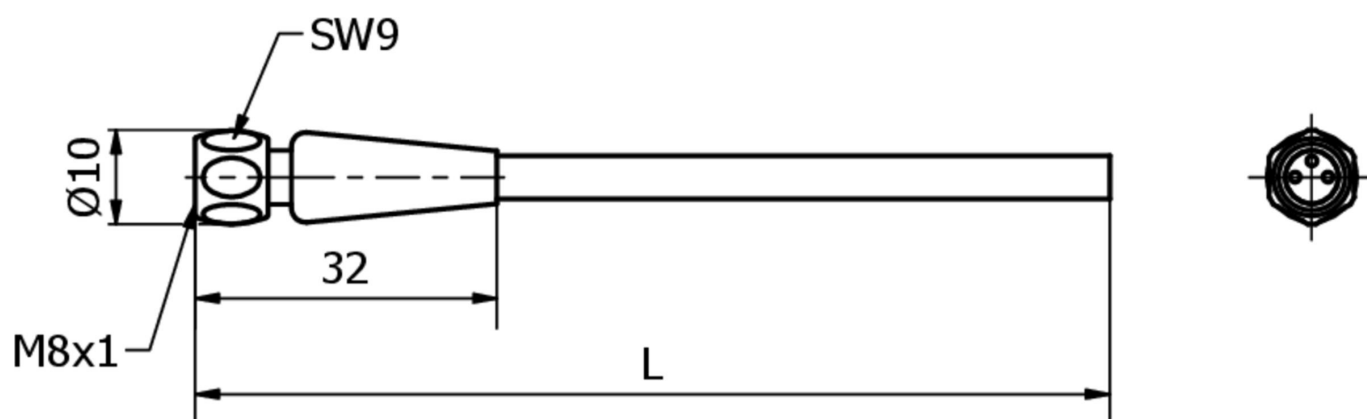

Extract accessories program

AV000130



Tool, Wire stripper,
28x166x102mm, Skinning range
diameter 4.4-7mm, Plastic

AV000132



Tool, Wire stripper,
28x166x102mm, Skinning range
diameter 3.2-4.4mm, Plastic

AV98F001



AV98F002



Tool, wrench insert for torque
wrench, SW13

AV000116



Labeling material, Label sleeve,
30mm long, Cable diameter 3.7-6.
2mm, Plastic, Transparent

AY000141



Plastic sheath, Ø17mm, Inner
diameter 10mm, -40-250°C, Glass
fiber with silicone rubber, Short-
term resistance to weld spatter
1200°C, Tensile strength 400N,
Flexible, Flame retardant, yard
good

AV000140



You can find further accessories on our homepage



Installation

Mounting / installation may only be carried
out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.