

## YT05F001

### Temperature sensors • Resistance thermometers

Temperature sensor, Ø4mm 26long, M5, PT100, 4-wire, medium temperature -30-180°C, connection to amplifier, M12 cable connector, 2m, silicone, IP67



Temperature measurement is of great importance in many industrial applications. We distinguish between two different measuring principles: 1. contactless and 2. media-contacting. Contactless measurement takes place via infrared radiation, which allows temperatures of up to 1800°C to be determined, as no peripherals of the system, such as the sensor, require contact with the medium or object. For this reason, these devices are often used in forges, rolling mills or steel processing companies in general. The measurement in contact with the medium is usually carried out in combination with a PT100 thermal resistor, which is then connected to the evaluation electronics or display devices. Areas of application for these system variants include cooling circuits, storage tanks, exhaust gas systems, extraction systems or ventilation systems.

#### Electrical features

Type of electrical connection	Cable connector M12
Type of temperature sensor	PT100
Measuring accuracy of temperature	0.15 °C
Protection class	III
Reverse polarity protection	No
Resistance circuit	4-wire
Connection to amplifier	Yes

#### Mechanical features

Type of process connection	M5
Design	Cylinder, screw-thread
Diameter	4 mm
Sensor material	Stainless steel 1.4404
Cable length	2 m
Length	25.7 mm
Maximum tightening torque	1.5 Nm
Medium temperature	-30 - 180 °C
Wrench size	8 mm
Degree of protection (IP)	IP67
Material of cable sheath	Silicone

#### Other features

In acc. with DIN IEC 751	Class A
--------------------------	---------


**Classification**

ETIM 8


**More**

IPF Product Group	310 temperature sensors
packaging dimensions	150 x 220 x 20 mm
gross weight	105 g
Customs tariff number	90251900
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection**

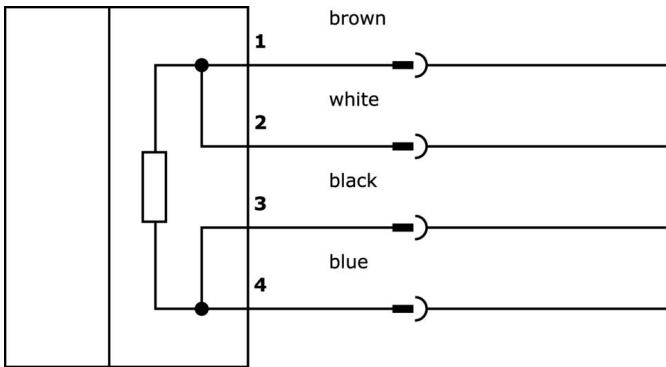

**Dimensional drawing**

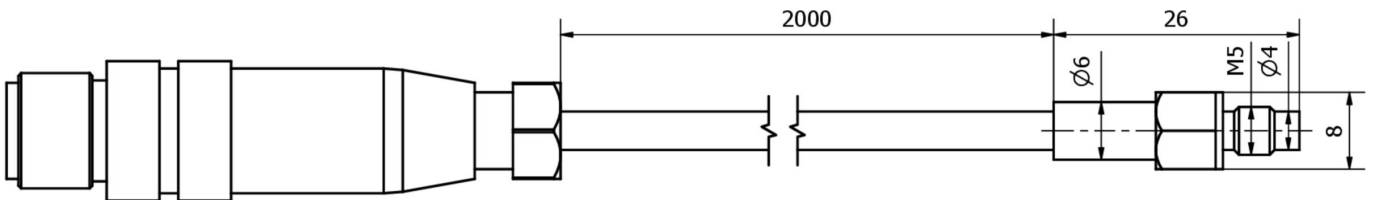

**Extract accessories program**

**VK030F21**



Connection cable, 0.3m, M12 socket 4-pin angular, M12 connector 4-pin straight, 4x0.34mm<sup>2</sup>, 240V, IP67, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

**VK030F25**



Connection cable, 0.3m, M12 socket 4-pin straight, M12 connector 4-pin straight, 4x0.34mm<sup>2</sup>, PUR (polyurethane), 240V, IP67, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

**YT353100**



Measuring transducer, temperature sensor, 118x40x40mm, -40-300°C, PT100, 4 digits, 12-32V DC, 2x PNP NC/NO, 0-10V/4-20mA, M12 plug connector, IP65, PA 6.6 (plastic), LED

**YT353120**



Measuring transducer, temperature sensor, 118x40x40mm, -40-300°C, PT100, 4 digits, 12-32V DC, 2x PNP NC/NO, 0-10V/4-20mA, M12 plug connector, IP65, PA 6.6 (plastic), LED

**VK003021**



Cable socket, Angular, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 60V, -25-90°C, M12 Female (socket) 5pin, IP67, PBT

**VK003025**



Cable socket, Straight, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 60V, -25-90°C, M12 Female (socket) 5pin, IP67, PBT

**VK003020**



Cable socket, angular, self-assembly, screw connection, Ø3-6.5mm, 4A, 240V, -25-90°C, M12 socket 4-pin, IP67, PBT

**VK003024**



Cable socket, Straight, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 240V, -25-90°C, M12 Female (socket) 4pin, IP67, PBT

You can find further accessories on our homepage



**Installation**

Mounting / installation may only be carried out by a qualified electrician!



**Disposal**

WEEE number according to § 6 para. 3 ElektroG: 40951076

**Safety warnings**

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.