


PY740026

Light section sensors

- / measurement of object heights
- / high measuring accuracy
- / flexible mounting -30°/+30°
- / with touch-display
- / aluminum housing



laser cutting procedure
laser protection class 2



General data

dimensions	26 x 55 x 85mm
function	object height
function: FLEX MOUNT and MEASURING FIELD	yes
measuring range (distance)	100 ... 500mm
start of measuring range	100mm
end of measuring range	500mm
measuring field size (width)	13 ... 66mm
measuring field width right @ end of measuring range	+33mm
measuring field width left @ end of measuring range	-33mm
blind range	0 ... 100mm
measuring frequency	
- OBJECT light (approx. 90% refl.)	440 ... 1540Hz
- OBJECT dark (approx. 6% refl.)	340 ... 770Hz
response time	
- OBJECT light (approx. 90% refl.)	1.3 ... 4.5ms
- OBJECT dark (approx. 6% refl.)	2.6 ... 5.8ms
resolution AVG DIST	15 ... 55µm (w/o filter)
(max. measuring field width)	8 ... 28µm (with filter precision high)
	4 ... 25µm (with filter precision very high)
resolution MIN / MAX DIST	70 ... 150µm (w/o filter)
	45 ... 75µm (with filter precision high)
	25 ... 45µm (with filter precision very high)
repeat accuracy AVG DIST	10 ... 40µm (w/o filter)
(max. measuring field width)	5 ... 25µm (with filter precision high)
	4 ... 20µm (with filter precision very high)
repeat accuracy MIN / MAX DIST	30 ... 90µm (w/o filter)
	20 ... 70µm (with filter precision high)
	15 ... 60µm (with filter precision very high)
linearity deviation	± 100µm
temperature drift	±0.04% Sde/K

PRECISION filter values:	median average
standard	off off
high	off 3
very high	16 3
smallest detectable object	1 ... 5mm
laser class	2
max. unevenness reference surface (rms)	1mm
min. length reference surface	12mm
LIVE MONITOR:	
min. object height	10mm
min. object width	12mm
digital hysteresis	1% of Sd (switching point)
operating display	LED green
output display	LED yellow / LED red
light source	laser diode red, pulsed
adjustment	touch display

Mechanical data

width / height / legth	26 / 74 / 55mm
design	cuboid, frontal optics
housing material	aluminum
front screen	glass
connection	M12-connector, 8-pin
weight	130g

Electrical data


operating voltage	15 ... 28V DC
current consumption max. (ohne Last)	120mA
output circuit	analog
output signal	4 ... 20mA / 0 ... 10V DC (adjustable)
switching output	push-pull
switching function	Out 1 / alarm
output current	< 100mA
reverse polarity protection	yes, +VS to GND
short-circuit protection	yes

Ambient conditions


ambient light immunity	< 35kLux
temperature (operating)	-10 ... +50°C
temperature (storage)	-25 ... +75°C
protection class	IP67
vibration resistance (sinusoidal)	IEC 60068-2-6:2008 7.5mm p-p for f = 2 - 8Hz, 2g for f = 8 – 200Hz, or 4g for 200 – 500Hz
resonance test	IEC 60068-2-6:2008 1.5mm p-p for f = 10 - 57Hz , 10 cycles for each axis 10g for f = 58 -2.000Hz, 10 cycles for each axis
vibration resistance (coincidence)	IEC 60068-2-64:2008 spectrum: 0.1g2/Hz for 20 – 1.000Hz, 30 minutes / axis (>10gRMS)
shock resistance	IEC 60068-2-27:2009 50g / 11ms or 100g / 6ms, 10 shocks in each axis and each direction

	100g / 2ms, 5.000 shocks in each axis and each direction
impact resistance	IEC 60068-2-27 100g / 2ms, 4,000 shocks in each axis and each direction
Optical data	
light source	AlGaInP laser diode
wave length	660nm
operating mode	pulsed
pulse duration	
mode light objects	0.15ms
mode dark objects	0.8ms
pulse period	
mode light objects	>0.65ms
mode dark objects	>1.3ms
emitted total pulse power	10mW
beam shape	elliptical (focused to laser line)
focal distance df	350mm
beam size @ window	
vertical	2.2mm
parallel	5.8mm
beam size @ focus point	
vertical	< 0.4mm
parallel	L = 65mm
beam divergence	
vertical	4.8mrad
parallel	9.4°
laser classification (IEC 60825-1/2014)	laser class 2
Nominal ocular hazard distance (NOHD)	1.5m

Connection



Dimensional drawing

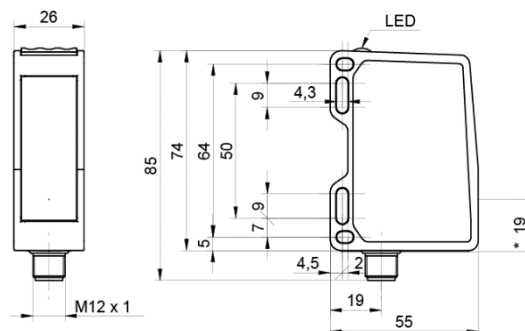

*optical axis

functions: 1 = n. c., 2 = L+, 3 = 4-20mA/0-10V, 4 = Push Pull, 5 = Alarm Push Pull, 6 = n. c., 7 = L-, 8 = Hold

colors: 1 = WH (white), 2 = BN (brown), 3 = GN (green), 4 = YE (yellow), 5 = GY (gray), 6 = PK (pink), 7 = BU (blue), 8 = RD (red)

Safety warnings:

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these articles in applications where the safety of a person depends on their functionality.