


RT550900

Radar sensors

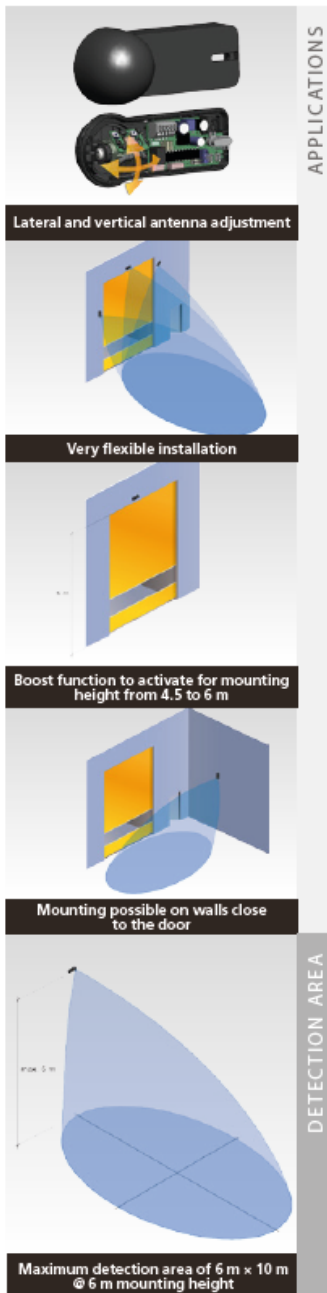

APPLICATIONS

- Motion sensor for industrial doors of any type

DESIGNED FOR INDUSTRIAL ENVIRONMENTS

- Rotating positioning: - 120° to + 120° in reference with the mounting central axis.
- Mounting height till 6 m.
- Parameter adjustment with remote control or push-buttons.
- Adaptation to industrial environment (IP64).

EASE OF INSTALLATION

- Simple installation (plug and play).

TECHNICAL SPECIFICATIONS

Technology	Microwave doppler radar
Transmitter frequency	24,150 GHz
Transmitter radiated power	< 20 dBm EIRP
Transmitter power density	< 5 mW/cm ²
Detection mode	Motion
Detection field	Max. 6 m x 10 m
Tilt angles	0° to 90° vertical; -120° to +120° lateral
Output	relay (free of potential change-over contact)
Max. contact voltage	42V AC - 60V DC
Max. contact current	1A (resistive)
Max. switching power	30W (DC) / 60VA (AC)
Min. detection speed	5 cm/s (measured in the sensor axis)
LED Signal	Blue
Mains frequency	50 to 60 Hz
Supply voltage	12V to 24V AC ±10% 12V to 24V DC +30% / -10%
Max power consumption	< 2 W
Mounting height	from 2 m to 6 m
Dimensions	140 mm (L) x 55 mm (H) x 57 mm (W)
Material	ABS
Colour	Grey
Weight	165 g
Cable length	10 m
Temperature range	from -30°C to +60°C
Degree of protection	IP64
Norm conformity	R&TTE 1999/5/EC; EMC 2004/108/EC

Safety note: If this has a direct impact on personal safety, the use of this product is prohibited.