

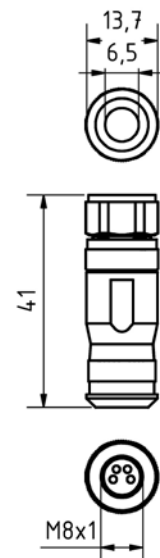
cable sockets, shielded

PRODUCT: field-attachable cable sockets
screw connection
shielded

DESIGN: M8, 4-pin, A-coded


Technical Data

contact carriers	PA6
contacts	CuZn
grip	CuZn, Ni
knurled nut	CuZn, Ni
sealing	silicone, NBR
protection class	IP 67 (in screwed condition)
temperature (operating)	-30 ... +85°C
mounting	screw connection
line diameter	5 ... 5.6mm
wire cross-section	max. 0.5mm ²
current rating capacity	4A (with 0.5mm ² at 40°C)
operating voltage	30V
degree of soiling	3
insulation resistance	> 100 MΩ
mechanical lifespan	> 100 mating cycles

dimensional drawing


article no.: **VK003275**