

cable connectors, shielded

**PRODUCT:** field-attachable cable connectors  
screw connection  
shielded


**DESIGN:** M8, 4-pin, A-coded



**Technical Data**

contact carriers	PA6
contacts	CuZn
grip	CuZn, Ni
knurled nut	CuZn, Ni
sealing	silicone, NBR
protection class	IP 67 (in screwed condition)
temperature (operating)	-30 ... +85°C
mounting	screw connection
line diameter	5 ... 5.6mm
wire cross-section	cable/wire cross-section max. 0,5mm <sup>2</sup>
current rating capacity	4A (with 0.5mm <sup>2</sup> at 40°C)
operating voltage	30V
degree of soiling	3
insulation resistance	> 100 MΩ
mechanical lifespan	> 100 mating cycles

**dimensional drawing:**

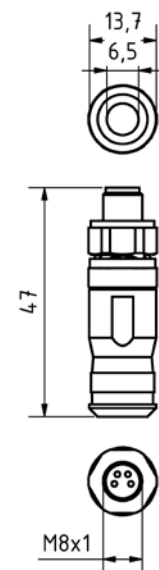

article no.: **VK003279**