

IV991196

Inductive sensors • Switching amplifier for high temperature sensors

Amplifier inductive, high temperature, 75x99x22mm, 10-35V DC, PNP NO, terminal, IP20, plastic, LED



Inductive proximity switches are contactless sensors. They detect all conductive metals, regardless of whether they are moving or not. The switching distance that the devices can achieve depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or from the front. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. oven flaps), counting (e.g. nuts / screws), speed detection (e.g. on gear wheels), on conveyor systems (e.g. hose feeds) or distance measurement (e.g. press-fit inspection) of metallic objects.

Electrical features

Number of channels	1
Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Clamped terminal connection
Type of switching output	PNP
Rated switching current	300 mA
Turn-on delay	0,1 s
Switching capacity	7.2 VA
Switching voltage	35 V
Operating voltage (DC)	10 - 35 V
Amplifier for inductive sensors	Yes

Mechanical features

Design	Cuboid
Width	22.5 mm
Height	75 mm
Length	99 mm
Mounting method	Top hat rail
Degree of protection (IP)	IP20
Housing material	Plastic
Ambient temperature	-25 - 70 °C

Other features

Version	Built-in device
---------	-----------------


Classification

ETIM 8	EC001485 Isolation amplifier
--------	------------------------------


More

IPF Product Group	202 inductive sensors (high temperature)
packaging dimensions	123 x 77 x 25 mm
gross weight	100 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

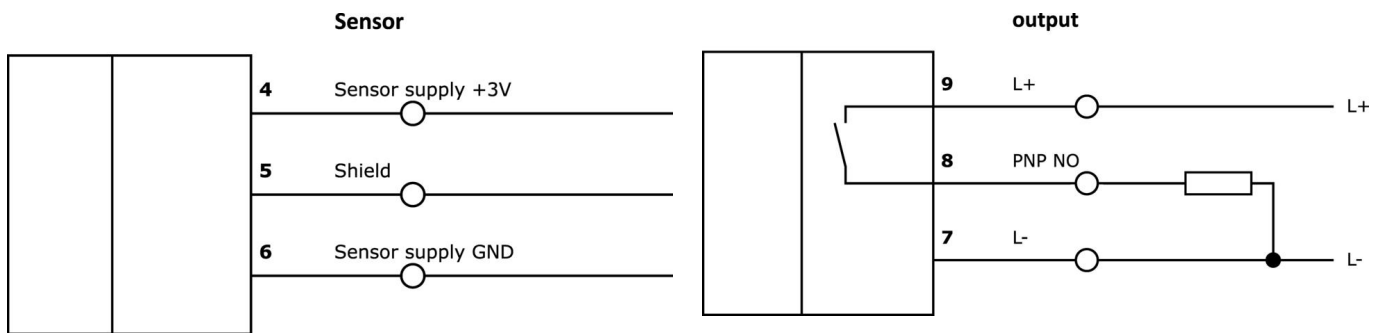

Dimensional drawing

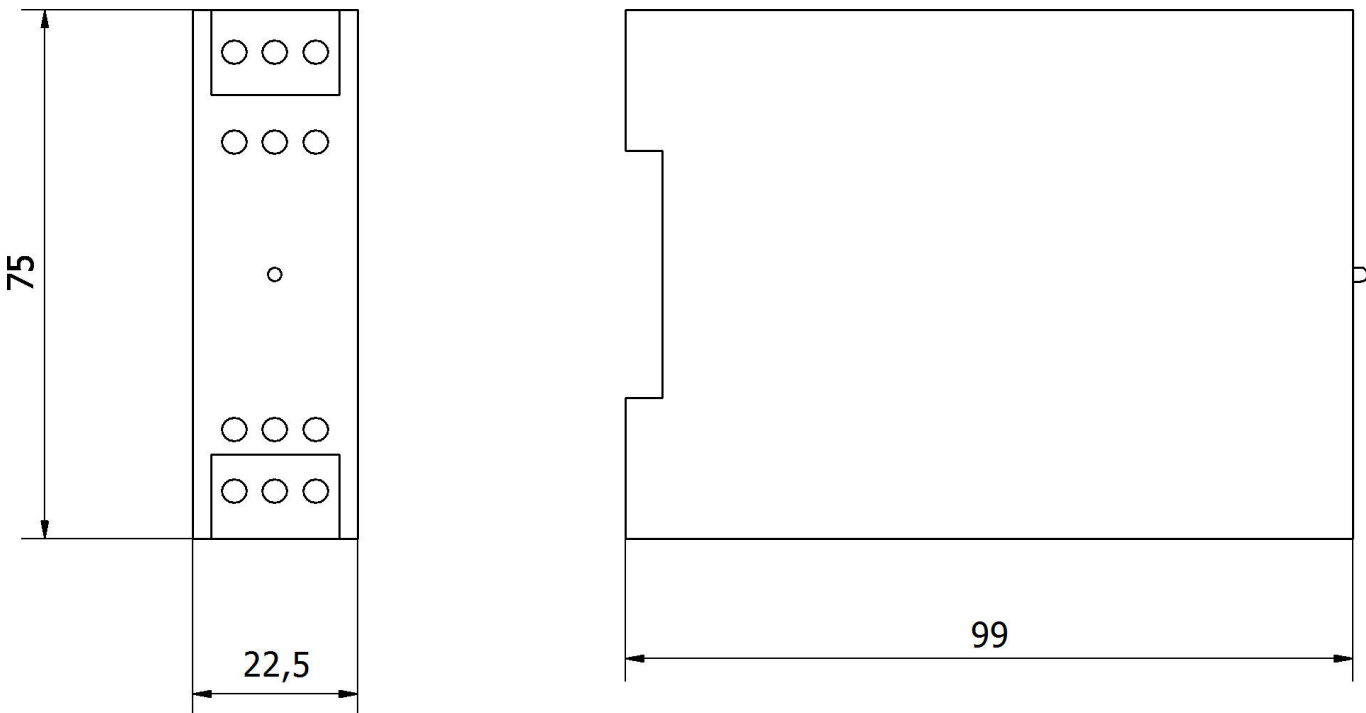

Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3 ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.