

NC852001

Power supplies • Switching power supply units 400V AC

DC power supply, 3-phase, 125x128x86mm, 24-28V, 20A, 340-550V AC, -30-70°C, Screw connection, IP20, Aluminum, Stabilized, Output voltage, pulsed



Pulsed power supplies are used to supply electrical systems or system parts with a stabilized DC voltage. Due to the lower copper losses, pulsed power supplies in the lower power range are considerably more efficient than power transformers. Furthermore, they are more compact and are lighter weight than conventional, linear regulated power supplies, which contain a heavy transformer with iron core and cause additional losses in the linear regulator.

Electrical features

Display	LED display
Type of electrical connection	Clamped terminal connection
Output voltage	24 - 28 V
Operating frequency	47 - 63 Hz
Setting procedure	Potentiometer
Power	480 W
Max. input current	0.85 A
Residual ripple	1 %
Ampacity	20 A
Overload protection	100 ... 130% of the power consumption
Operating voltage (AC 50Hz)	340 - 550 V
Operating voltage (AC 60Hz)	340 - 550 V
Output functions	Switching point
Type of voltage stabilization	Clocked

Mechanical features

Width	85.5 mm
Weight	1300 g
Height	125.2 mm
Storage temperature	-40 - 85 °C
Length	128.5 mm
Mounting method	Top hat rail
Degree of protection (IP)	IP20
Housing material	Aluminum
Ambient temperature	-30 - 70 °C

Other features

Relative air humidity (non-condensing)	20 - 95 %
Stabilized	Yes


Classification


ETIM 8	EC002540 DC power supply
--------	--------------------------

More

IPF Product Group	400 power supply units
packaging dimensions	170 x 120 x 155 mm
gross weight	1545 g
Customs tariff number	85044083
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

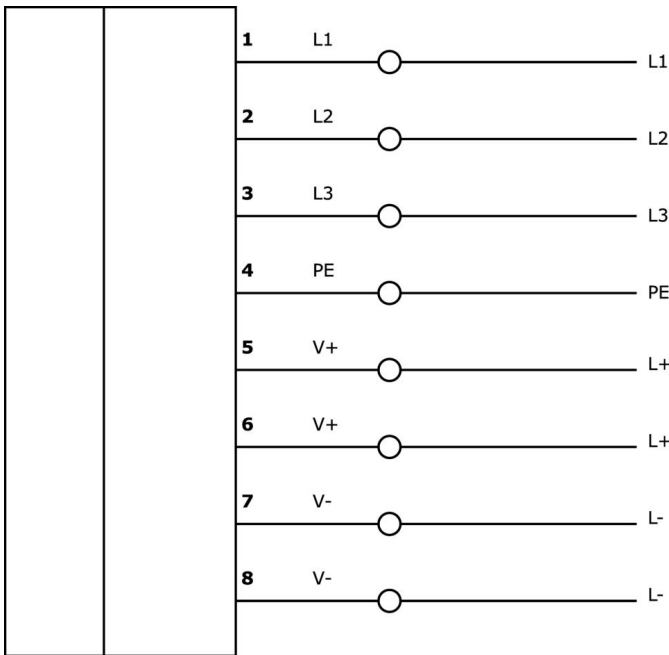

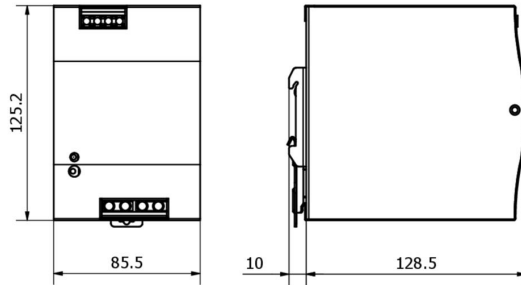Dimensional drawing**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.