

VK107F46

Connection technology • Cable sockets / connectors pre-assembled on two sides

Connection cable, 1m, M9 connector 4-pin straight, M9 connector 4-pin straight, 4-core, PUR (polyurethane)



This connection cable has pre-wired connections on both sides. It can be used to cost-effectively integrate end devices with a plug connection via a distribution terminal or a logic module.

Electrical features

Type of plug-in contact, A connection	Male (connector)
Type of plug-in contact, B connection	Male (connector)
Type of A electrical connection	M9
Type of B electrical connection	M9
Number of pins of A connection	4
Number of pins of B connection	4

Mechanical features

Number of cores	4
Cable length	1 m
Cable infeed of A connection	straight
Cable infeed of B connection	straight
Material of cable sheath	Kunststoff (PUR)

Other features

ardTE00_Anwendungen	Schleppkettentauglich
---------------------	-----------------------

Classification


ETIM 8	EC001855 Assembled sensor-actuator cable
--------	--

More


IPF Product Group	856 cable socket / cable connector (diverse)
packaging dimensions	175 x 100 x 10 mm
gross weight	60 g
Customs tariff number	85444290
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

connector

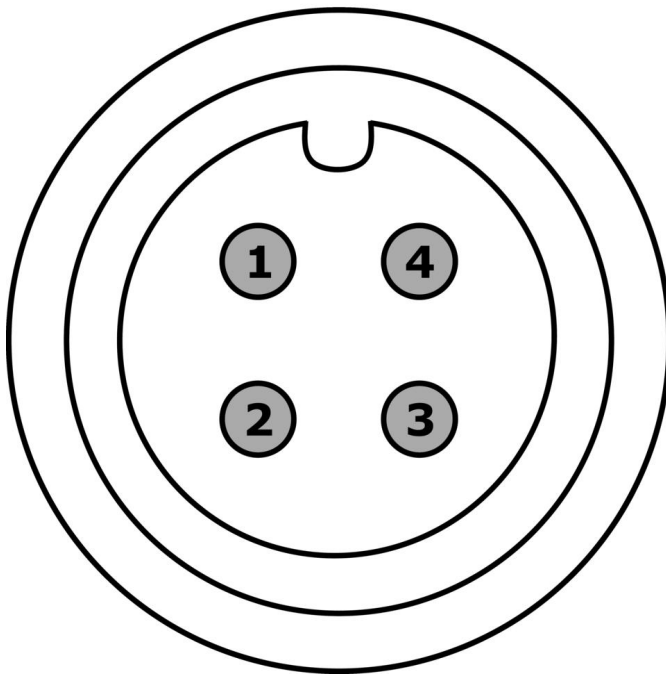

connector

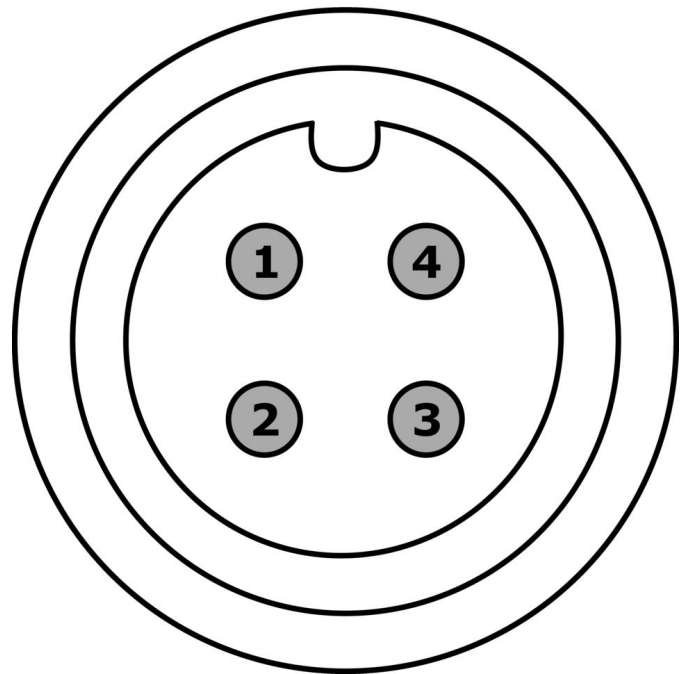

Extract accessories program**AY000141**

Plastic sheath, Ø17mm, Inner diameter 10mm, -40-250°C, Glass fiber with silicone rubber, Short-term resistance to weld spatter 1200°C, Tensile strength 400N, Flexible, Flame retardant, yard good

AV98F001**AV98F002**

Tool, wrench insert for torque wrench, SW13

AV000141

accessories cable socket, Mounting clip, 13.5mm, PPO, Packaging unit 5, Accessories for Cable socket/connector M12

AV000140

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.