

## VK707F46

### Connection technology • Cable sockets / connectors pre-assembled on two sides

Connection cable, 7m, M9 connector 4-pin straight, M9 connector 4-pin straight, 4-core, PUR (polyurethane)



This connection cable has pre-wired connections on both sides. It can be used to cost-effectively integrate end devices with a plug connection via a distribution terminal or a logic module.

#### Electrical features

Type of plug-in contact, A connection	Male (connector)
Type of plug-in contact, B connection	Male (connector)
Type of A electrical connection	M9
Type of B electrical connection	M9
Number of pins of A connection	4
Number of pins of B connection	4

#### Mechanical features

Number of cores	4
Cable length	7 m
Cable infeed of A connection	straight
Cable infeed of B connection	straight
Material of cable sheath	Plastic (PUR)
Suitable for trailing chain	Yes

#### Classification


ETIM 8	EC001855 Assembled sensor-actuator cable
--------	--

#### More


IPF Product Group	856 cable socket / cable connector (diverse)
packaging dimensions	175 x 120 x 10 mm
gross weight	194 g
Customs tariff number	85444290
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

**connector**

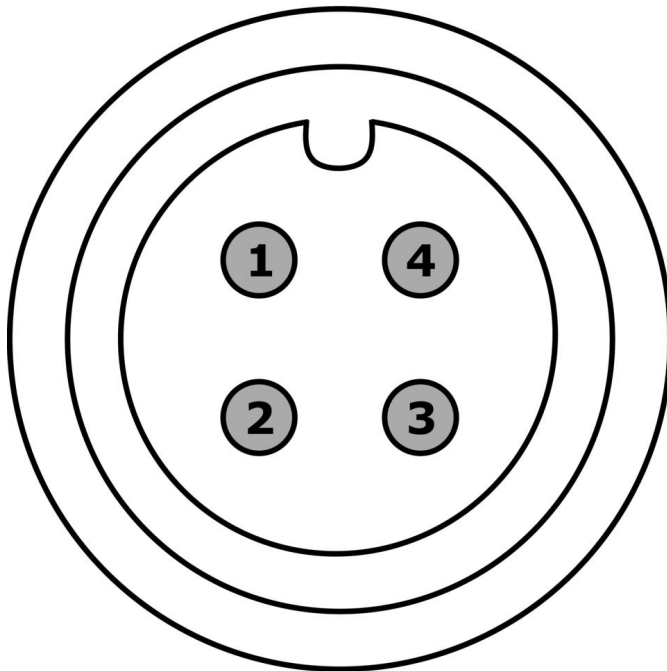

**connector**

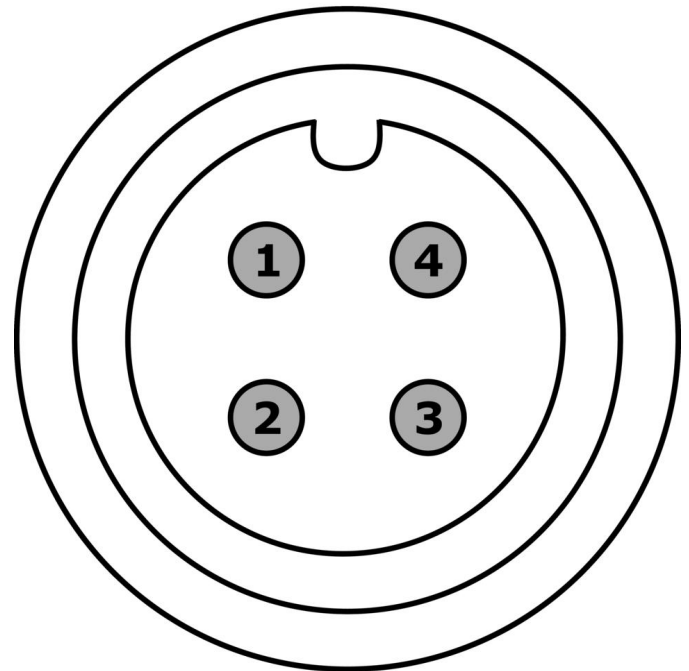

Extract accessories program

**AV000141**



accessories cable socket,  
Mounting clip, 13.5mm, PPO,  
Packaging unit 5, Accessories for  
Cable socket/connector M12

**AY000141**



Plastic sheath, Ø17mm, Inner  
diameter 10mm, -40-250°C, Glass  
fiber with silicone rubber, Short-  
term resistance to weld spatter  
1200°C, Tensile strength 400N,  
Flexible, Flame retardant, yard  
good

**AV98F001**



**AV98F002**



Tool, wrench insert for torque  
wrench, SW13

**AV000140**



You can find further accessories on our homepage



**Installation**

Mounting / installation may only be carried  
out by a qualified electrician!



**Disposal**

WEEE number according to § 6 para. 3  
ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.