

LT207017

Fiber optic sensors • Fiber optics plastic fiber diffuse-reflection sensor

fiber optic diffuse-reflection sensor, 2m, head: Stainless steel 25long M4x0.7 M3x0.5 M4x0.7, Light exit Axial, conductor: Plasticfiber+Plastic, -55-80°C, IP40, coaxial, for attachment optics

including Nut, Washer



Fiber optics in combination with the appropriate fiber optic amplifier function as contactless and wear-free position switches that can also be used in harsh environmental conditions. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). Because the ends and heads of the fiber optics have small dimensions and the fiber optics are flexible, very elegant solutions can be created for detecting objects in places that are difficult to access. Fiber optics can be used without special precautions in potentially explosive areas and in zones with electrical and/or magnetic fields (high-voltage installations, electrical welding equipment) as their function is not thereby affected. Fiber optics are available in versions for implementing the function as through-beam sensor or diffuse reflection sensor.

Electrical features

Bending section of the sensing head	0 mm
Bending angle of the sensing head	0 °
Short-circuit protection	No
Sensing head length	25 mm
Switching distance	0 - 70 mm
Reverse polarity protection	No
Sensing head thread pitch	0.7 mm

Mechanical features

Type of fiber	Mono
Design	Cylinder, screw-thread
Bending radius (flexible)	10 mm
Bending radius (fixed)	2 mm
Sensing head diameter 1	2.3
Fiber diameter	0.5 mm
Fiber optic cable diameter, receiver end	1.3
Fiber optic cable diameter, transmitter end	1
Sensing head diameter	4 mm
Number of fibers	1
Length	2000 mm
Degree of protection (IP)	IP40
Sheathing material	Plastic
Fiber optics core material	Plastic
Sensing head material	Stainless steel
Ejection control	Yes
Design of the fiber optic connection	terminal connection
Thread dimension of sensing head 1	M3
Thread dimension of sensing head	M4
Thread dimension of sensing head 2	M4
Ambient temperature	-55 - 80 °C

Optical features

Light exit	axial
Nominal operating distance	70 mm
Fiber optic for attachment optics	Yes
Fiber optic with coaxial structure	Yes

Other features

Sensing head thread pitch 1	0.5
Sensing head thread pitch 2	0.7
Feeding technology	Yes
Thread dimension of sensing head 1	M3
Thread dimension of sensing head 2	M4
ardTE00_Anwendungen	Stanzwerkzeuge starke Verschmutzung


Classification

ETIM 8	EC002651 Fiber optic sensor/amplifier
--------	---------------------------------------

More

IPF Product Group	151 plastic fibers
packaging dimensions	123 x 77 x 25 mm
gross weight	20 g
Customs tariff number	90011090
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Dimensional drawing

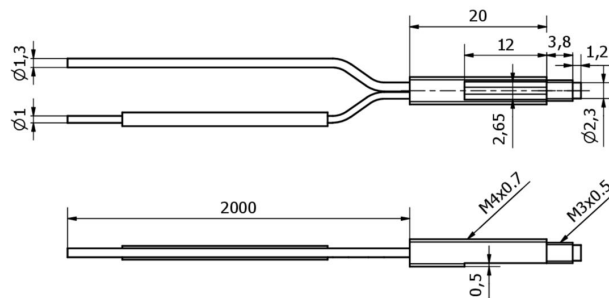

Extract accessories program

AL000023



accessories fiber optic, Optic top part, diffuse-reflection sensor, M3x0.5 15long, Internal thread, Aluminum+Glass

AL000024



accessories fiber optic, Optic top part, zoom lens, diffuse-reflection sensor, M4x0.7 27long, für Diffuse reflection sensor, Internal thread, Aluminum+Glass

OL100340



fiber optic-amplifier, 30x70x10mm, 12-24V DC, 1x PNP NC/NO, Plug-in connection 3pin, IP40, Plastic, Polarity free red light

OL100341



fiber optic-amplifier, 30x70x10mm, 12-24V DC, 1x PNP NC/NO, Plug-in connection 3pin, IP40, Plastic ABS, Blue light

AL000007



accessories fiber optic, Fiber cutter, barrier, diffuse-reflection sensor, 13mm high, Cubic, Stainless steel

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

- / Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.
- / Never use these devices in applications where the safety of a person depends on their functionality.