


LTSI0321

Accessories • Fiber optics for color sensors - Diffuse reflection sensors

fiber optic diffuse-reflection sensor, 0.6m, head: Stainless steel 21.5long Ø4, Light exit Lateral, conductor: Glassfiber+PVC, end piece: M18x1 Plastic



Fiber optics in combination with the appropriate fiber optic amplifier function as contactless and wear-free position switches that can also be used in harsh environmental conditions. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). Because the ends and heads of the fiber optics have small dimensions and the fiber optics are flexible, very elegant solutions can be created for detecting objects in places that are difficult to access. Fiber optics can be used without special precautions in potentially explosive areas and in zones with electrical and/or magnetic fields (high-voltage installations, electrical welding equipment) as their function is not thereby affected. Fiber optics are available in versions for implementing the function as through-beam sensor or diffuse reflection sensor.

Electrical features

Bending angle of the sensing head	0 °
Short-circuit protection	No
Sensing head length	21.5 mm
Reverse polarity protection	No

Mechanical features

Type of fiber	Multi
Design	Cylinder plain
Bending radius (flexible)	10 mm
Bending radius (fixed)	10 mm
Sensing head diameter 1	4
Fiber diameter	2.5 mm
End piece diameter	22 mm
Light exit diameter	2.5
Fiber optic cable diameter	5
Sensing head diameter	4 mm
Number of fibers	1
End piece thread pitch	1 mm
Length	600 mm
End piece length	35 mm
Sheathing material	Plastic (PVC)
End piece material	Plastic
Fiber optics core material	Glass
Sensing head material	Stainless steel
Ejection control	Yes
Design of the fiber optic connection	screw fitting M18
Thread dimension of the end piece	M18
Ambient temperature	-20 - 80 °C

Optical features

Light exit	Lateral
------------	---------

Other features

Suitable for	Color sensors with white light source / fiber optics
Feeding technology	Yes
ardTE00_Anwendungen	Stanzwerkzeuge


Classification

ETIM 8	EC002651 Fiber optic sensor/amplifier
--------	---------------------------------------

More

IPF Product Group	705 special devices (SI)
packaging dimensions	123 x 77 x 25 mm
gross weight	36 g
Customs tariff number	90011090
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Dimensional drawing

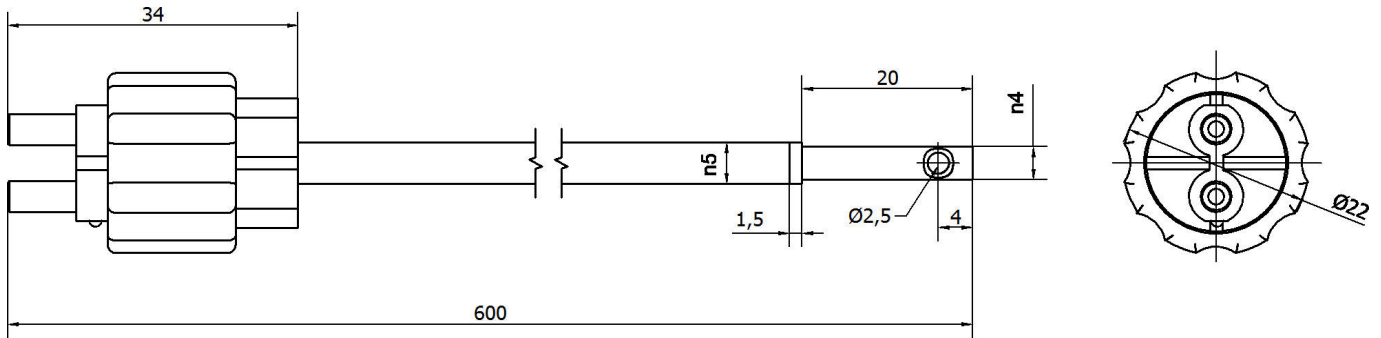

Extract accessories program

OF500180



sensor optical, color,
36x50x50mm, White light, True
color, Sn: 1-500, 22-26V DC, 2x
PNP/NPN Push-pull, Connector M8
4pin, IP64, Aluminum Anodised,
With fiber optics connection, ΔE
>= 0.5, 60kHz, 3 colors

OF650080



sensor optical, color,
36x65x65mm, White light, True
color, Sn: 1-500, 22-26V DC, 2x
PNP/NPN Push-pull, Connector M9
8pin, IP64, Aluminum Anodised,
With fiber optics connection, ΔE
>= 0.5, 60kHz, 3 colors

You can find further accessories on our homepage



Installation

Mounting / installation may only be carried out by a qualified electrician!



Disposal

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.