

VKB08F28

Connection technology • Data transfer



Electrical features

Type of plug-in contact, A connection	Male (connector)
Type of plug-in contact, B connection	Male (connector)
Type of A electrical connection	M12
Type of B electrical connection	RJ45
Number of pins of A connection	8
Number of pins of B connection	8
Operating voltage (AC 50Hz)	50 V
Operating voltage (DC)	50 V
Shielded	Yes
ardSOCA_ElektrischerAnschluss	
ardTEEL_Uebertragungsklassifizierung	Cat5e
ardSOCA_Betriebsspannung	
Coding of connection A	X

Mechanical features

Number of cores	8
Wire assembly	7 x 0.16mm
Conductor cross-section	0.14 mm ²
Outer diameter	6.5 mm
Cable sheath color	green
Cable length	20 m
Cable infeed of A connection	straight
Cable infeed of B connection	straight
Housing material	TPU
Material of cable sheath	Kunststoff (PUR)
Perm. ambient temperature of cable, fixed cable	-40 - 75 °C
Ambient temperature	-30 - 70 °C
ardTEME_WerkstoffDerKontakteAnschlussA	CuSn, gold-plated
ardTEME_WerkstoffDerKontakteAnsWerkstoff_der_Kontakte_AnschCuZn, gold-plated	
ardTEME_Werkstoffeigenschaften	Halogenfrei


Classification

ETIM 8	EC002599 Patch cable copper industry
--------	--------------------------------------


More

IPF Product Group	851 cable sockets / connectors (both side ready made)
packaging dimensions	350 x 250 x 50 mm
gross weight	1013 g
Customs tariff number	85444290
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

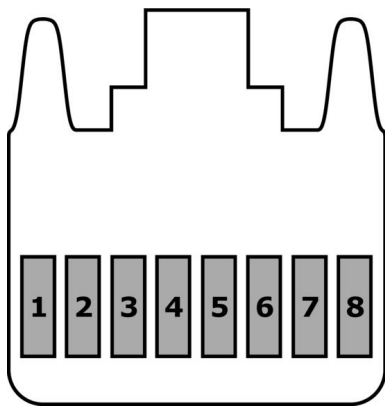


- 1 white/orange
- 2 orange
- 3 white/green
- 4 blue
- 5 white/blue
- 6 green
- 7 white/brown
- 8 brown

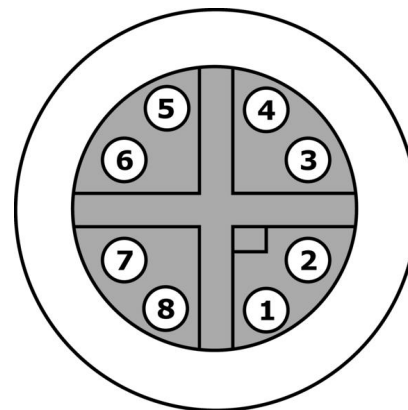

- 1 white/orange
- 2 orange
- 3 white/green
- 4 green
- 5 white/brown
- 6 brown
- 7 white/blue
- 8 blue

Dimensional drawing

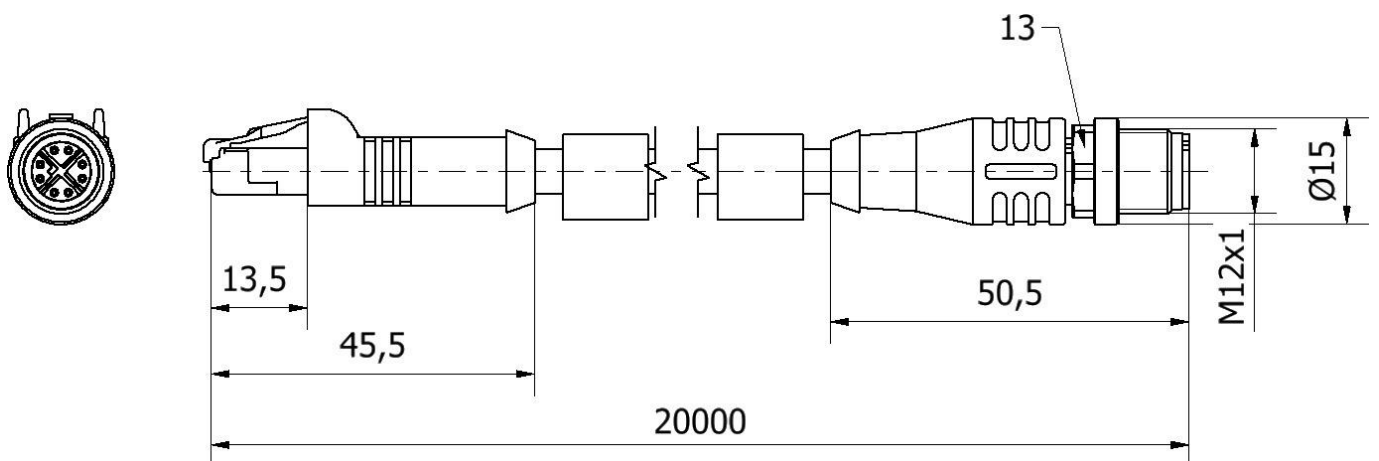

Extract accessories program**AV98F001****AV98F002**

Tool, wrench insert for torque wrench, SW13

AY000141

Plastic sheath, Ø17mm, Inner diameter 10mm, -40-250°C, Glass fiber with silicone rubber, Short-term resistance to weld spatter 1200°C, Tensile strength 400N, Flexible, Flame retardant, yard good

AV000140

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**WEEE number according to § 6 para. 3
ElektroG: 40951076**Safety warnings**

/ Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

/ Never use these devices in applications where the safety of a person depends on their functionality.